
Assembly & Installation Instructions

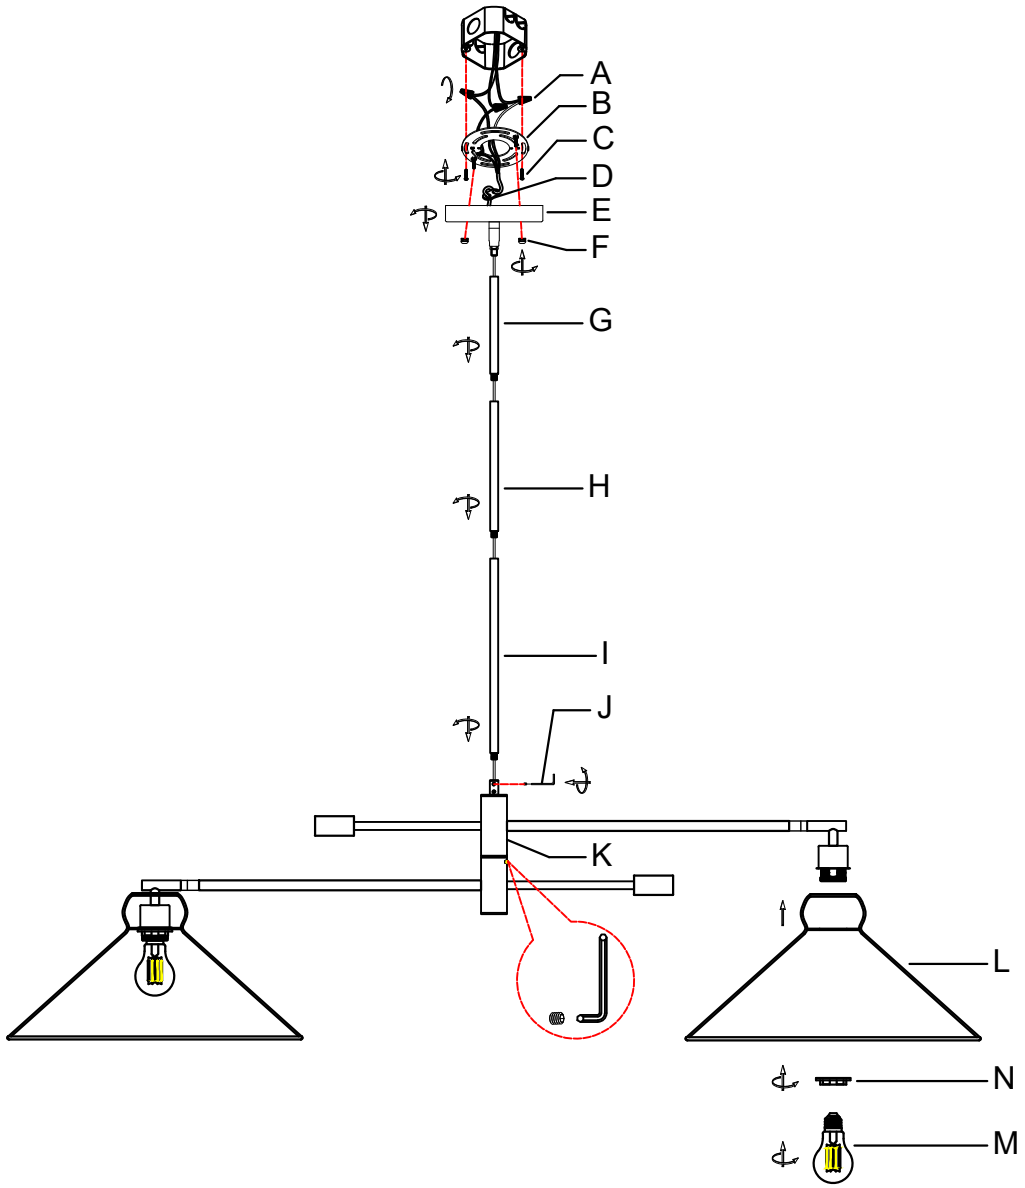

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Position and adjust the threaded rod (K) properly, then use a wrench to tighten and secure the screw.
2. Install the suspension rods as needed for height - first thread the wires from the threaded rod (K) through the suspension rods (I, H, G), then tighten the rods.
3. Thread the wires through the canopy (E), then fasten the canopy (E) to the suspension rod (G).
4. Tighten the screws on the threaded rod (K) with the hex wrench (J).
5. Secure the mounting bracket (B) to the junction box with the mounting screws (C).
6. Connect the wires by using the wire caps (A) as follows:

Connect the fixture's LIVE wire to the home LIVE wire.

Connect the fixture's NEUTRAL wire to the home NEUTRAL wire.

Connect the fixture's ground wire to the home ground wire.

Secure the fixture's ground wire to the mounting bracket with the green grounding screw. Then, tuck all wires into the junction box.

*Note: make sure no bare wires are exposed to prevent electric leakage.

7. Secure the canopy (E) to the mounting bracket (B) with the knurled nuts (F).

8. Secure the lampshade (L) to the lamp holder by using the light socket shade ring (N).

9. Install the bulb (M) (not included).

10. Restore power and test the bulb.