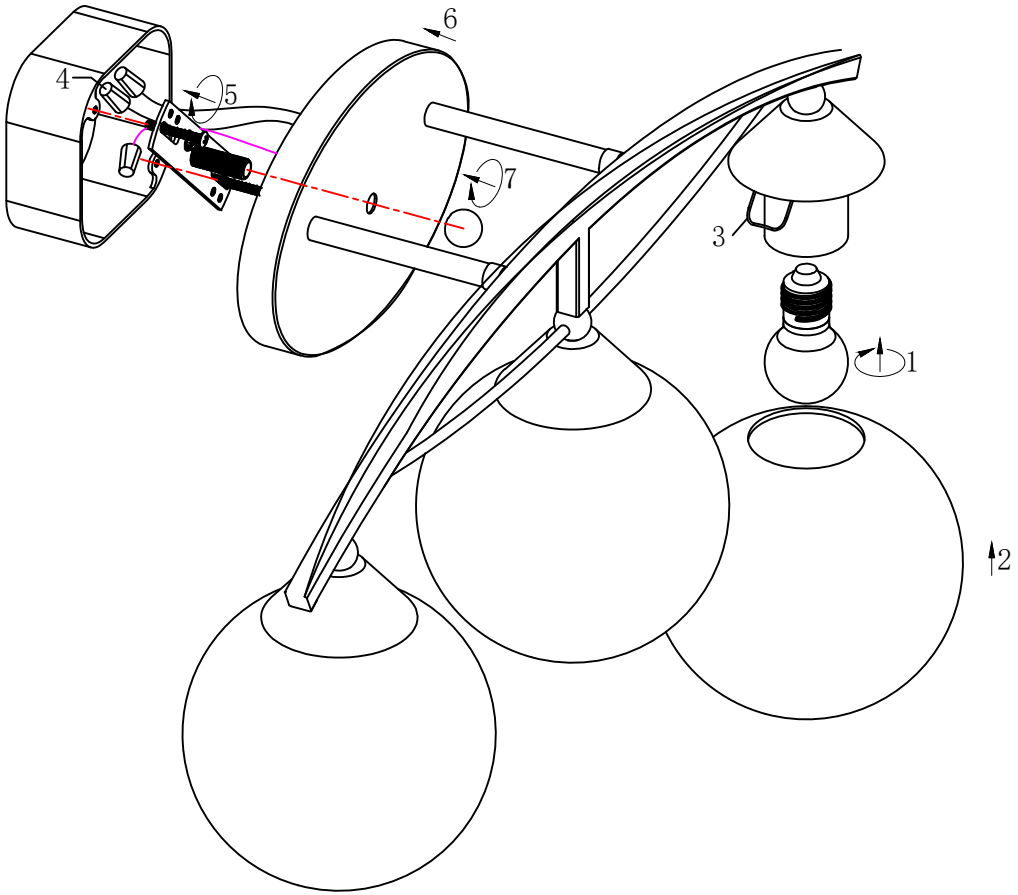


PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Install 3 pieces of E26-base bulbs(1, Not include) onto the sockets.
2. Tab the spring bracket(3) into the top of the glass globes(2) to clamp them on the lamp cap tightly.
3. Connect the wires using wire connectors(4) as follows:
Fixture BLACK wire to home LIVE wire.
Fixture WHITE wire to home NEUTRAL wire.
Wrap the fixture ground wire around the green screw, and tighten them on the mounting bracket. Connect to the home ground wire with a wire connector(4).
NOTE:The bare wire can NOT be exposed to prevent leakage.
4. Secure the mounting bracket to the junction box with 2 mounting screws(5).
5. Align the mounting hole on the back plate(6) with the bolt on the mounting bracket, and tighten with the cap nut(7) to secure the whole light onto the wall.