
Assembly & Installation Instructions

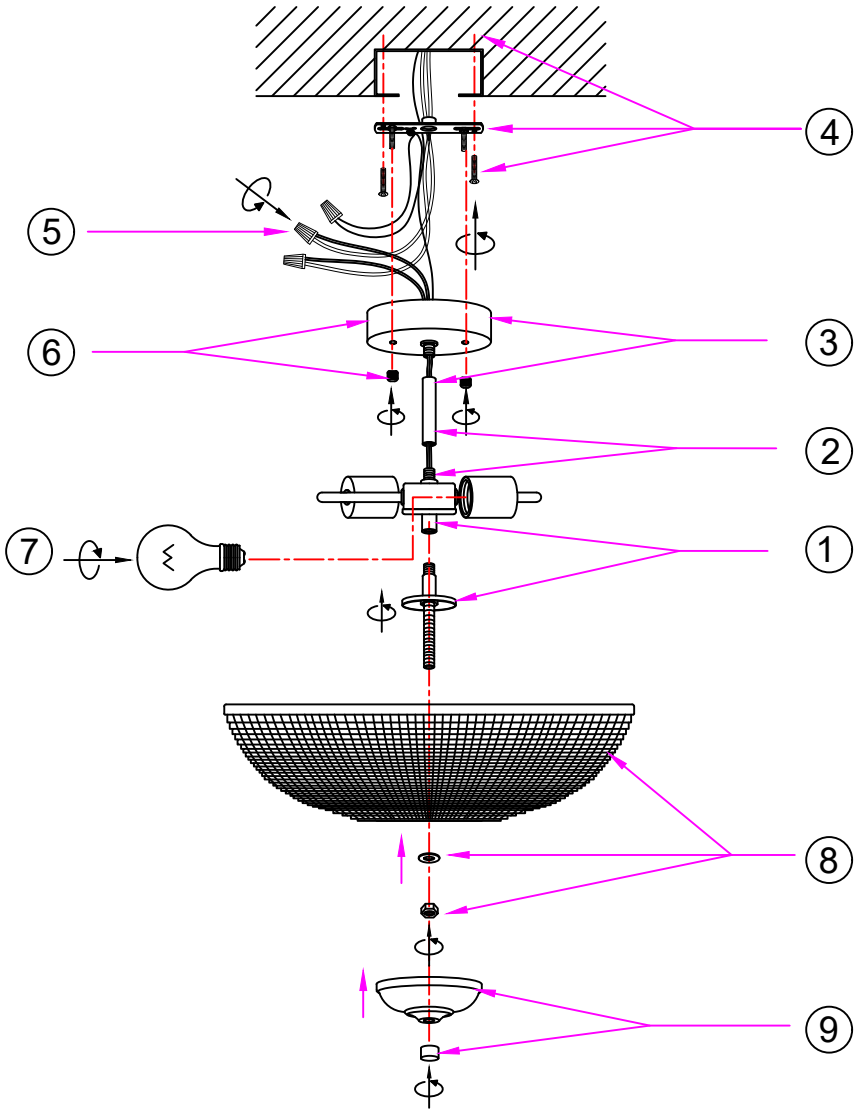

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Tighten the flat cover assembly onto the lamp base and adjust the length of the threaded pipe.
2. Pass the wire through the center pipe and twist the center pipe onto the lamp base.
3. Pass the wire through the back plate and tighten the back plate onto the center pipe.
4. Use mounting screws to firmly attach mounting plate to junction box.
5. Use the wire cap to tightly connect the black wire in the back plate to the black wire in the junction box. Similarly, connect the white wire in the back plate and the junction box. Make sure no bare wires are exposed to prevent electric leakage. Fix the ground wire of the lamp body and the external ground wire to the mounting plate with the green screw.
6. Secure the back plate to the mounting plate with the decorative nuts.
7. Screw E26 light bulbs (not included) tightly onto the lamp holders.
8. Lift the glass shade and pass it through the center threaded pipe, put on the rubber gasket and use the nut to secure the glass.
9. Put the lamp cover on the threaded tube and then tighten the decorative nut.
10. Turn on the power to check if the lamp is working properly. Installation is complete.