
# Assembly & Installation Instructions

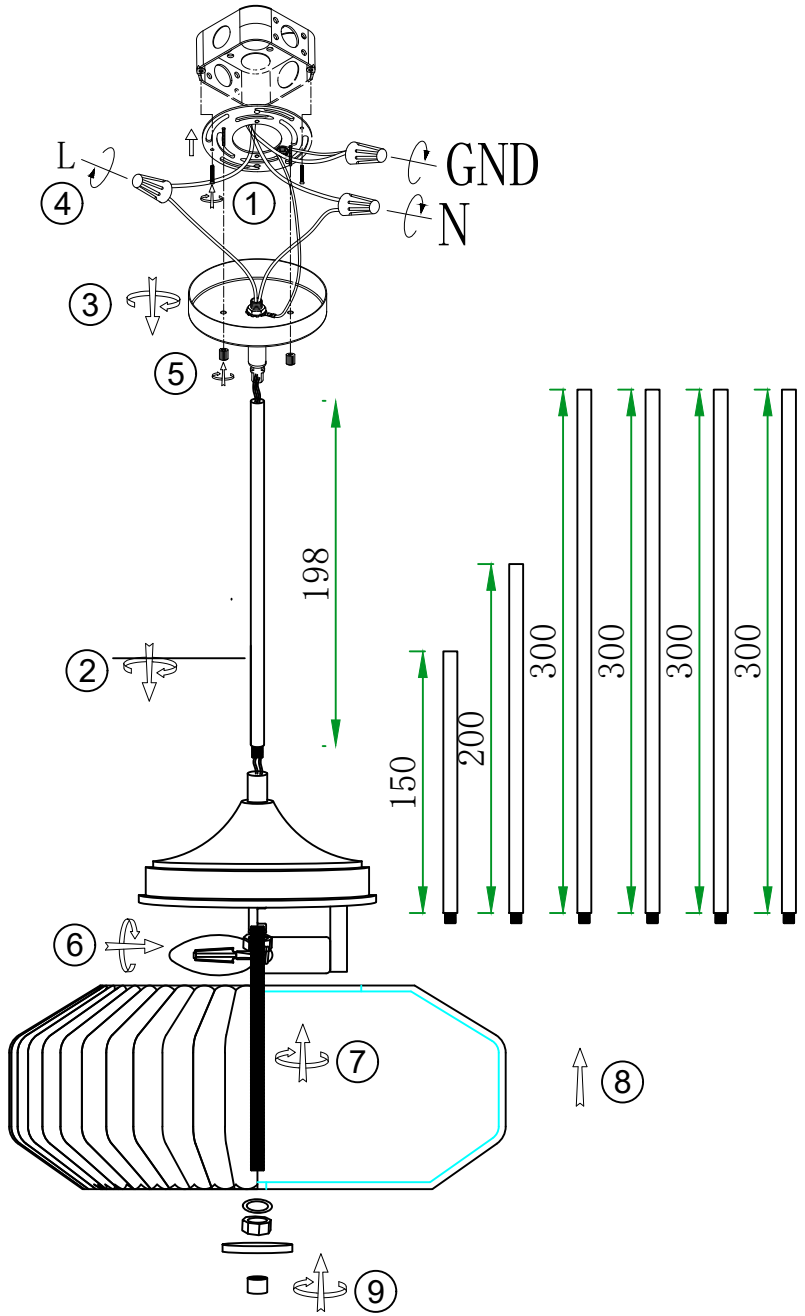


## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

1. Secure the mounting bracket to the junction box with the mounting screws.
2. Select the suspension rod according to the required height, thread the wires through it, then connect and fasten.
3. Thread the wires through the canopy and fasten them in place.
4. Connect the wires by using the wire caps as follows:
Connect the fixture's LIVE wire to the home LIVE wire.
Connect the fixture's NEUTRAL wire to the home NEUTRAL wire.
Connect the fixture's ground wire to the home ground wire.
Secure the fixture's ground wire to the mounting bracket with the green grounding screw.
Then, tuck all wires into the junction box.
Note: make sure no bare wires are exposed to prevent electric leakage.
5. Secure the canopy to the mounting bracket by using the knurled nuts.
6. Install the bulb (not included) into the lamp holder.
7. Tighten the threaded tube onto the fixture. (Secure the end with the determined length to the fixture; if the length is inappropriate, adjust the positioning nut.).
8. Secure the lampshade onto the fixture.
9. Slide the washer onto the threaded tube, secure it with a nut. Then fit the metal disk with mounting hole over it and fasten with a flat head nut.
10. Restore power and test the bulb.