
Assembly & Installation Instructions

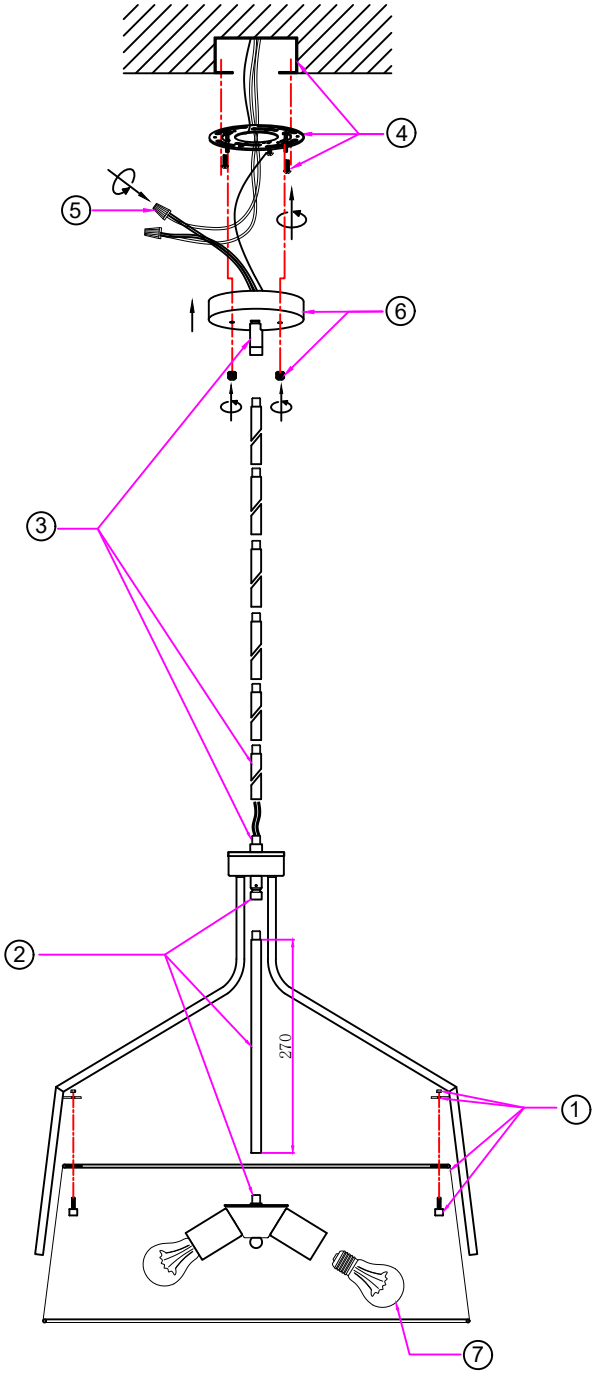

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Curved Arm & Shade Assembly
Position the curved arm, then secure the lampshade onto the arm with a screw bolt and tighten the nut.
Step 2:Downrod Wiring
Thread the main wire and ground wire through the down rod (270mm / 10.6 in), pass them through the fixture hub, then tighten the rod and fixture hub onto the fixture body.
Step 3:Canopy & Downrod Installation
Select a suitable downrod length. Route the line wires and ground wire through the downrod and canopy, then secure the downrod and canopy together. Install and tighten them onto the fixture body.
Step 4:Mount Bracket
Secure the mounting bracket firmly to the ceiling junction box.
Step 5:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.
Step 6:Fixture Installation
Use metal hardware to securely fasten the fixture body to the mounting bracket.
Step 7:Install Bulb
Install the bulb (bulb not included).
Step 8:Power Test
Turn on the power and verify that the bulb is functioning properly
Installation is complete