
Assembly & Installation Instructions

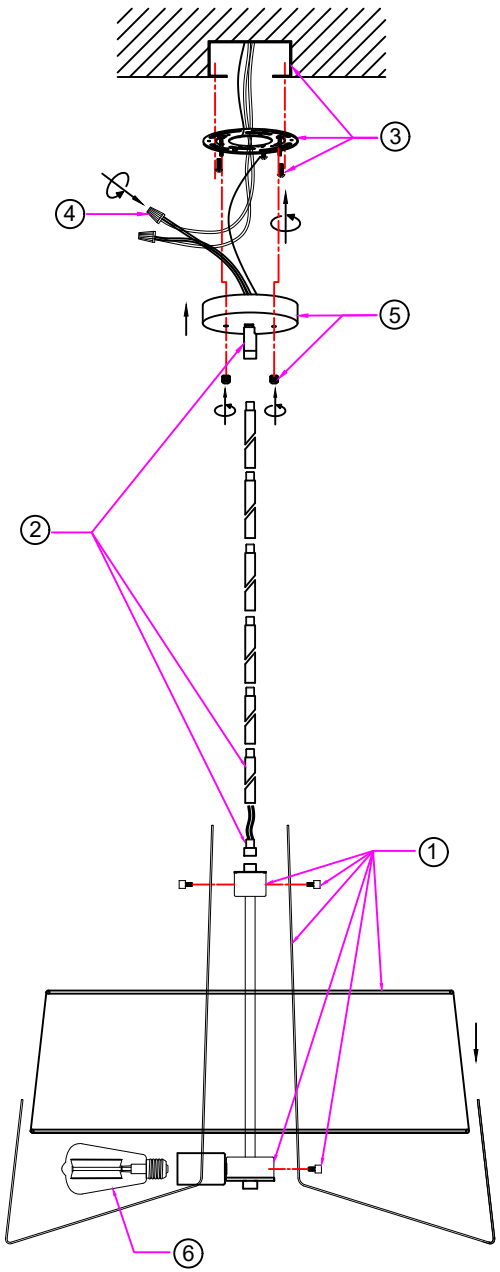

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Install the Lampshade Assembly
Place the lampshade onto the curved metal brackets, then use nuts to secure the brackets from both the top and bottom onto the center rod of the fixture body.
Step 2: Install the Downrod and Canopy Assembly
Adjust the downrod to the ideal length. Thread the main power wire and ground wire through the downrod and ceiling canopy, then tighten and assemble the downrod and canopy onto the fixture body.
Step 3: Secure the Mounting Plate
Attach and tighten the mounting plate to the ceiling junction box using the provided screws.
Step 4: Connect the Wiring
Use wire nuts to connect the fixture wires to the house wiring as follows:
Black (hot) wire → black (hot) wire
White (neutral) wire → white (neutral) wire
Ground wire → ground terminal
Caution: Ensure all wire connections are secure and no bare wire is exposed outside the wire nuts.
Step 5: Attach the Fixture to the Mounting Plate
Lift the fixture and secure it to the mounting plate using decorative cap nuts.
Step 6: Install the Light Bulb
Install the light bulb according to the diagram. (Light bulb not included.)
Step 7: Restore Power and Test
Turn on the power and verify that the fixture is operating properly.
Installation Complete