

Assembly & Installation Instructions

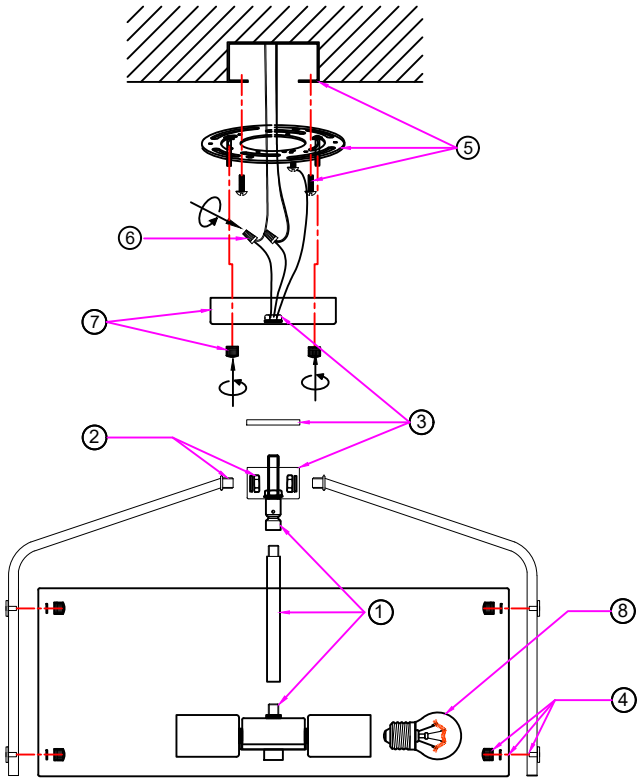

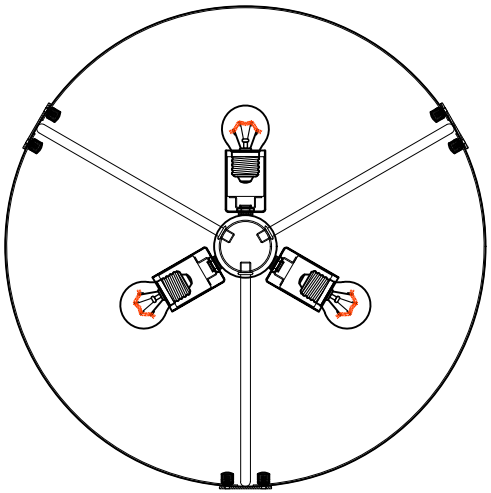

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Assemble the Fixture Body
Pass the main wire through the center rod and fixture hub assembly, then connect and secure the assembly to the fixture.
Step 2:Install the Curved Tubes
Insert the curved tubes into the side holes of the fixture hub assembly and secure them with nuts.
Step 3:Install the Canopy Components
Pass the flat cover through the main wire and place it over the fixture hub assembly. Then pass the canopy through the wire and secure it to the fixture bracket with nuts.
Step 4:Attach the Lampshade
Insert the threaded end of the curved arm through the metal lampshade and secure it with the decorative finial nut.
Step 5:Mount Bracket
Secure the mounting bracket to the U.S. standard junction box using the screws(flat-head).
Step 6:Connect Wires
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.
Step 7:Secure the Canopy
Attach the canopy to the mounting bracket and tighten it securely with finial nuts.
Step 8:Install Bulb
Install the bulb (bulb not included).
Step 9:Power Test
Turn on the power and verify that the bulb is functioning properly.
Installation is complete