
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

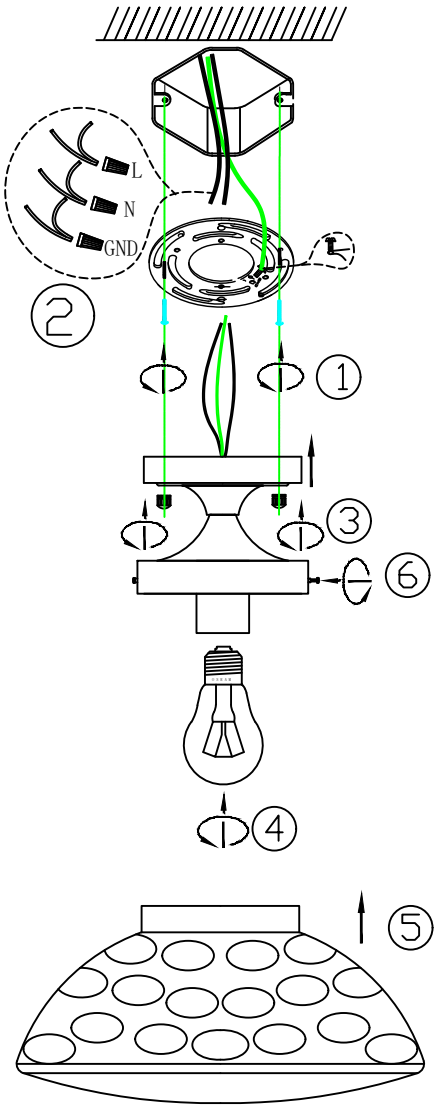

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

Step 1: Use the mounting screws to attach the mounting bracket to the electrical junction box on the ceiling.

Step 2: Wire Connections

· Connect the fixture live wire (black or marked "L") to the household live wire (L) using a wire nut.

· Connect the fixture neutral wire (white or marked "N") to the household neutral wire (N) using a wire nut.

* Ensure no exposed wires are visible to prevent electrical hazards.

· Secure the fixture ground wire to the mounting bracket using the green ground screw and connect it to the external ground wire.

Step 3: Slide the canopy over the mounting bracket and secure it with the decorative nut.

Step 4: Install the bulb (not included).

Step 5-6: Insert the glass shade into the decorative cover, align the side holes on the glass shade with the side holes on the decorative cover, then tighten the hand-tightened screws to secure it.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.