
Assembly & Installation Instructions

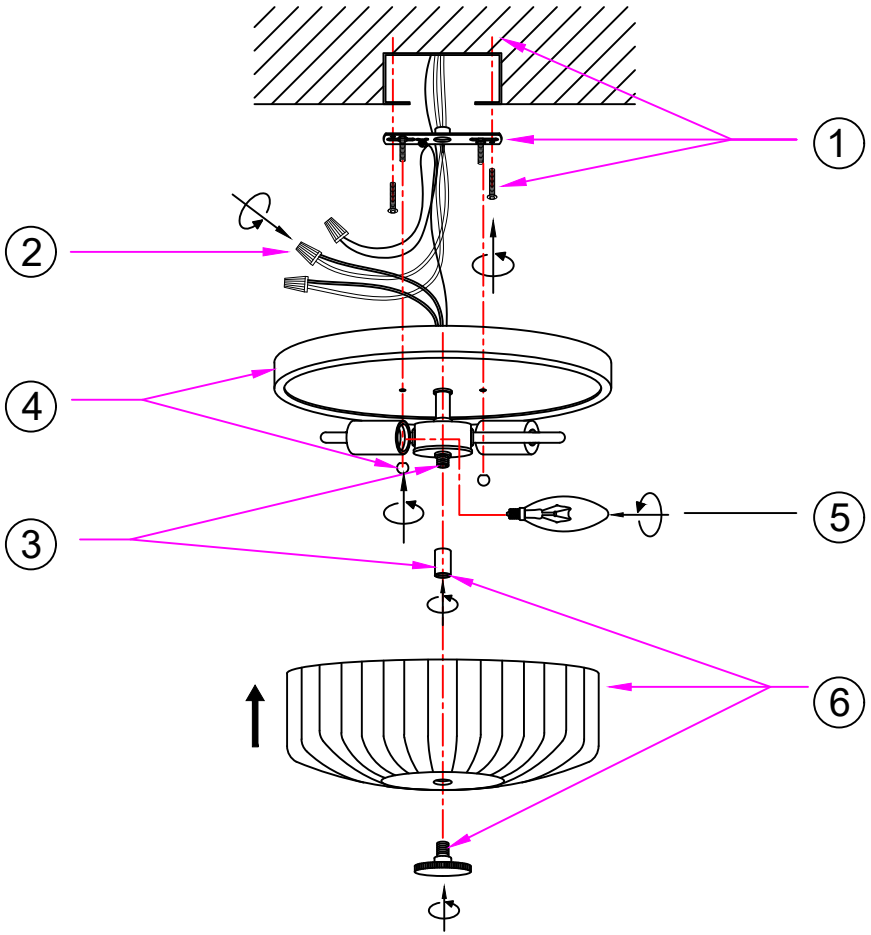

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Secure the mounting bracket to the junction box with 2 mounting screws.
2. Make wire connections with wire nuts as follows:
Connect the BLACK wire from fixture to home LIVE wire.
Connect the WHITE wire from fixture to home NEUTRAL wire.
Attach the fixture ground to the mounting bracket with the green screw, and then connect it to the home ground wire using the wire nut.
Note: The bare wire can NOT be exposed to prevent leakage.
3. Tighten the screw tube onto the bottom of the lamp holder.
4. Attach the fixture canopy against the mounting bracket, secure with 2 ball nuts as shown.
5. Install bulbs(Not Included) onto the socktes.
6. Cover the glass shade onto the canopy, align the mounting hole with the screw tube, and secure the whole light fixture together with a decorative nut from the bottom.
7. The installation is now complete. test the fixture.