
# Assembly & Installation Instructions

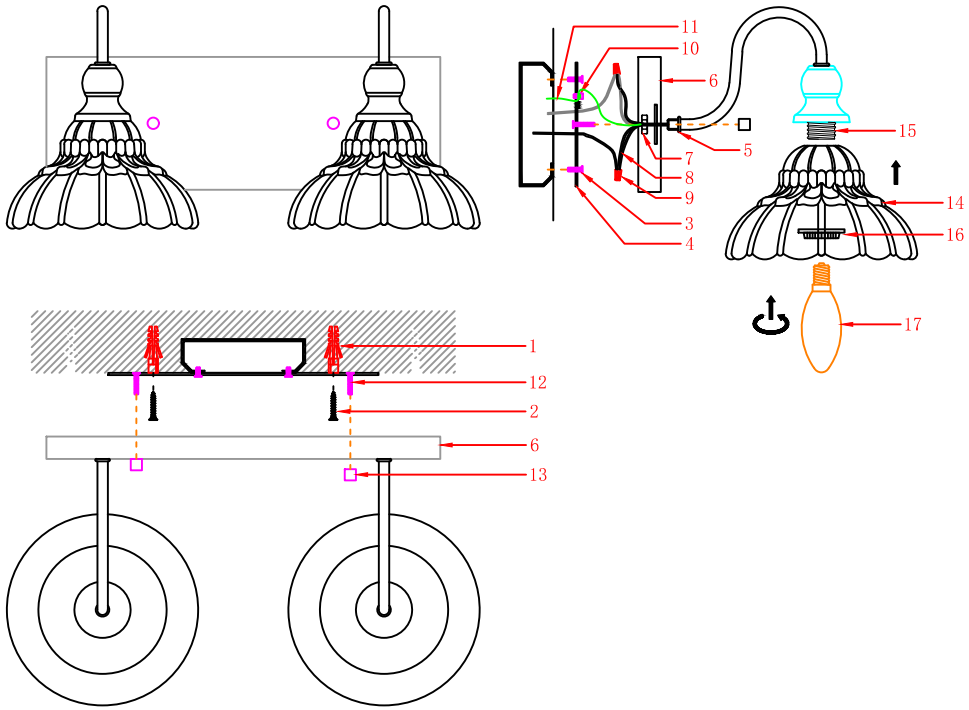


## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

A. Align the mounting bracket with the junction box holes, mark and drill the holes, insert wall anchors (1), then secure the mounting bracket (4) to the junction box and wall with self-tapping screws (2) and junction box screws (3).
B. Pass the lamp arm (5) through the hole of the canopy (6), then tighten the nut (7).
C. Connect the wires by using the wire caps (9) as follows:
Connect the fixture's LIVE (BLACK) wire (8) to the home LIVE (BLACK) wire.
Connect the fixture's NEUTRAL (WHITE) wire (8) to the home NEUTRAL (WHITE) wire.
Connect the fixture's ground wire (11) to the home ground wire.
Secure the fixture's ground wire (11) to the mounting bracket with the green grounding screw (10). Then, tuck all wires into the junction box.
Note: make sure no bare wires are exposed to prevent electric leakage.
D. Pass screws (12) through the two small holes of the canopy (6), then tighten the knurled nuts (13) to secure the light fixture.
E. Place the lampshade (14) onto the lamp holder (15), then secure it with the light socket shade ring (16).
F. Install the bulb (17) (not included) into the lamp holder (15), then restore power to test it.