
Assembly & Installation Instructions

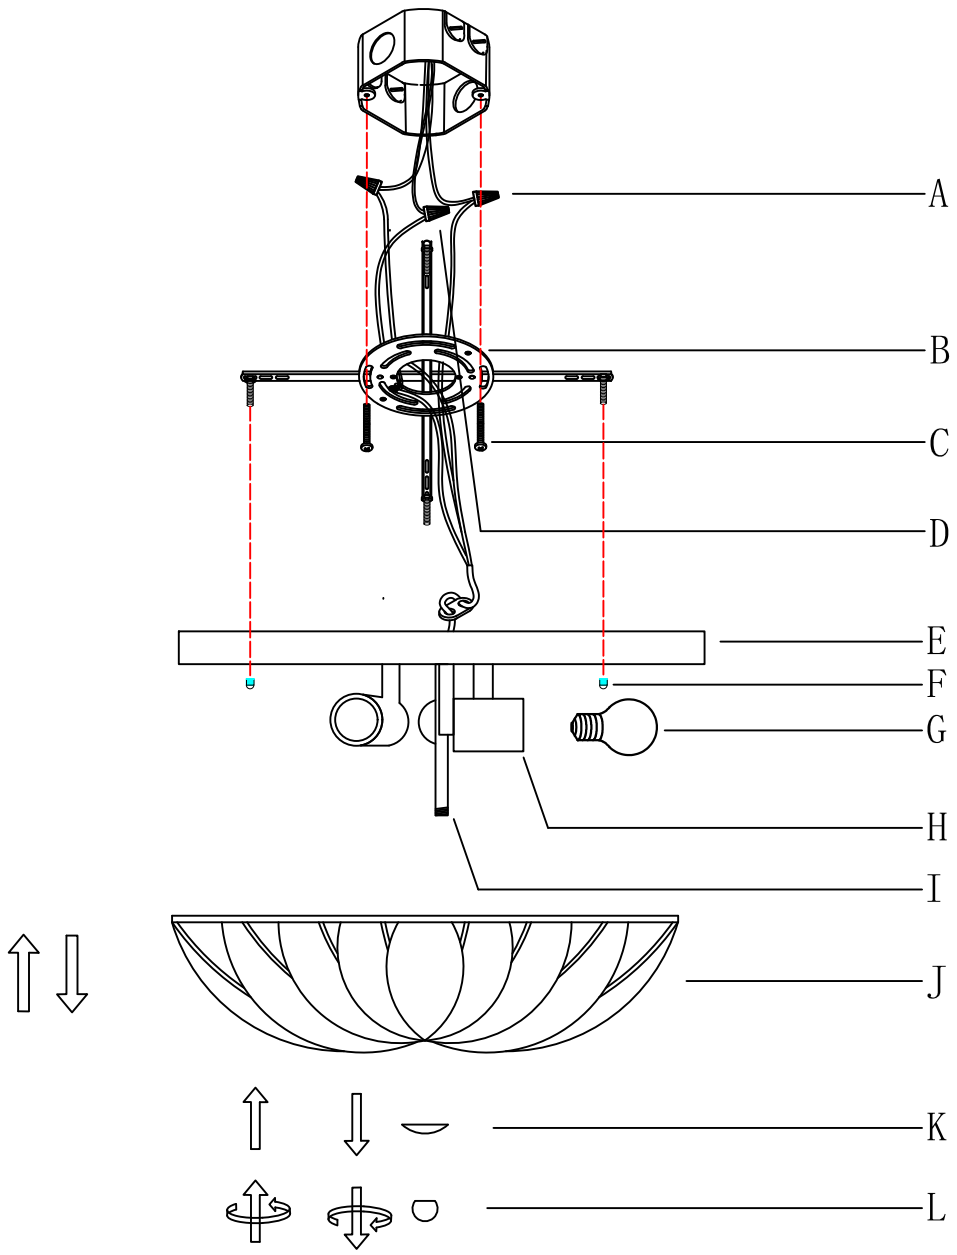

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Turn off the power supply.
2.Loosen the metal cap (L), then remove the metal washer (K) and lampshade (J) from the straight rod (I).
3.Secure the mounting plate (B) to the junction box with the provided screws (C).
4.Connect the wires using the wire caps as follows:
Connect the fixture's **BLACK** wire to the home **LIVE/HOT** wire.
Connect the fixture's **WHITE** wire to the home **NEUTRAL** wire.
Connect the fixture's GREEN wire to the home **GROUND** wire to the mounting plate with the green screw.
Note: Ensure no wire strands are exposed.
5.Secure the canopy plate (E) to the mounting plate (B) with the knob caps (F).
6.Install the bulbs (not included) (G) onto the lamp holder (H).
7.Attach the lampshade (J) and metal washer (K) to the straight rod (I), then tighten the lampshade (J) using the metal cap (L).
8.Restore the power and check if the light works properly.