
Assembly & Installation Instructions

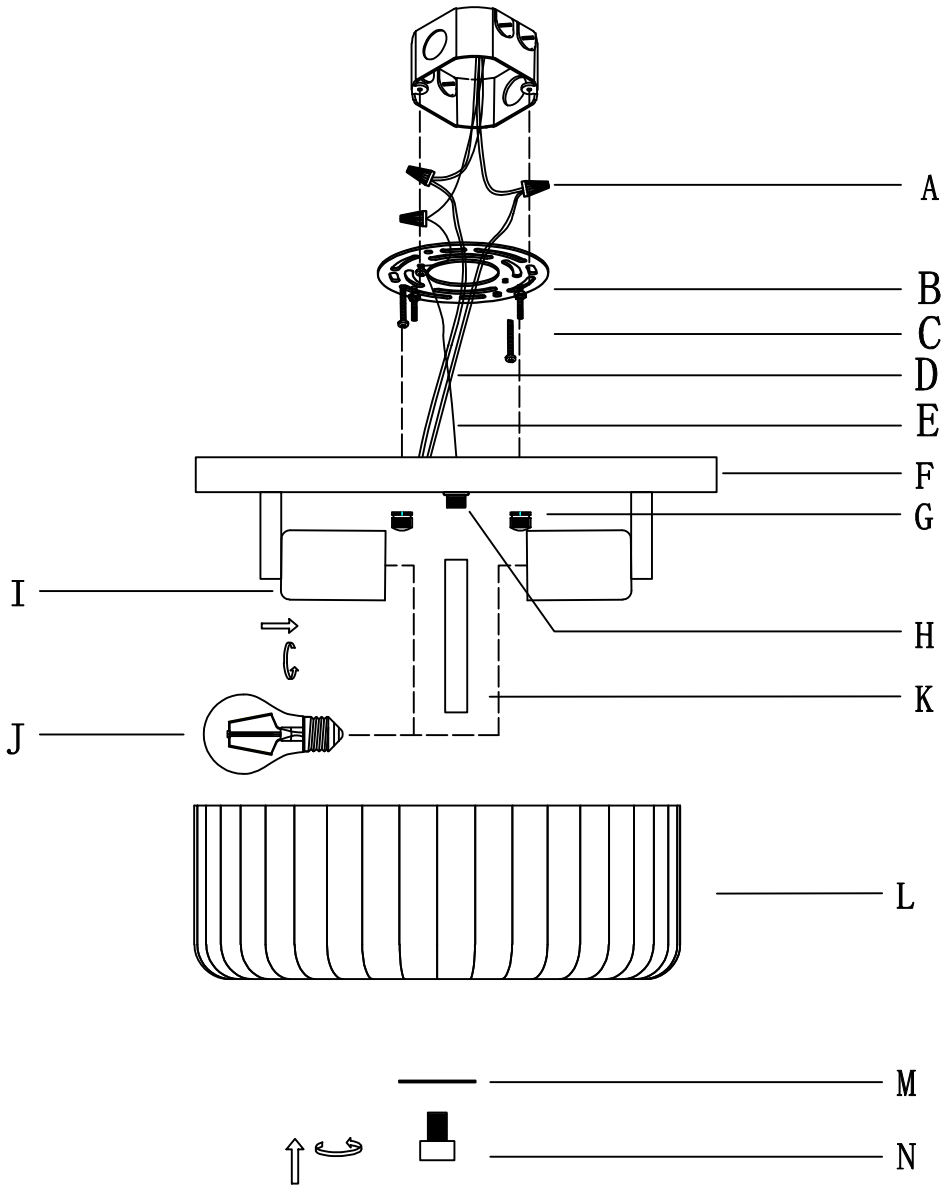

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Turn off the power.
2. Twist the straight pipe (K) onto (H) and secure it.
3. Secure the mounting bracket (B) to the junction box with the mounting screws (C).
4. Connect the wires (D) using the wire caps (A) as follows:
   Connect the fixture **BLACK** wire to the home **LIVE/ HOT** wire.
   Connect the fixture **WHITE** wire to the home **NEUTRAL** wire.
   Secure the fixture ground wire (E) and external ground wire to mounting bracket with green screw, then use the wire cap (A) to connect the fixture ground wire (E) to the external ground wire.
   Note: Ensure no bare wire is exposed to prevent leakage.
5. Use decorative nuts (G) to fix the back plate (F) to the mounting bracket (B).
6. Install the E26 bulbs (not included) (J) onto the lamp holders (I).
7. Use a flat head nut (N) with a steel nipple to pass through the hole in the metal disk (M) and the hole in the glass shade (L).
8. Twist the steel nipple on the flat head nut (N) onto the straight pipe (K) and fix it on the back plate.
9. Turn on the power.