
Assembly & Installation Instructions

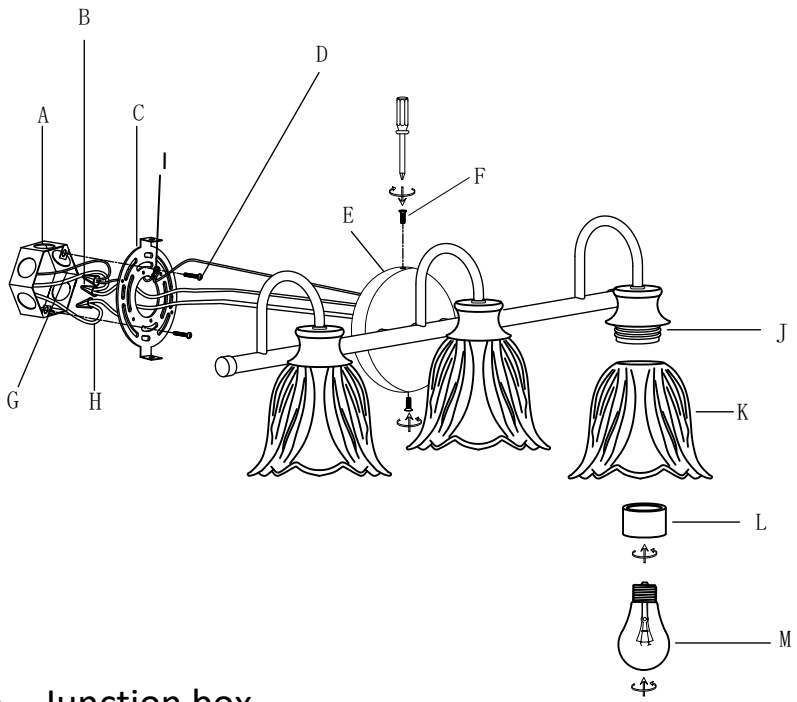

A：Junction box
B：Wire connector
C：Mounting bracket
D：Cross recessed pan head screw
E：Round back plate
F：Screw
G：LIVE wire and NEUTRAL wire
H：BLACK wire and WHITE wire
I：Green screw
J：Light socket
K：Glass lampshade
L：Light socket collar ring
M：Bulb (NOT included)

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Secure the mounting bracket (C) to a U.S.-standard junction box (A) with cross recessed pan head screws (D) .
2. Connect the wires using wire connectors as follows:
Connect the BLACK wire of the main wire to the LIVE wire (G).
Connect the WHITE wire of the main wire to the NEUTRAL wire (G).
Secure the fixture GROUND wire and external ground wire to the mounting bracket (C) using the green screw (I).
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
3. Secure the light fixture to the mounting bracket (C) with the screw (F).
4. Align the glass lampshade (K) with the light socket (J) and tighten it with the light socket collar ring (L).
5. Install the bulb (M) (NOT included) onto the light socket (J) as indicated.