

Assembly & Installation Instructions

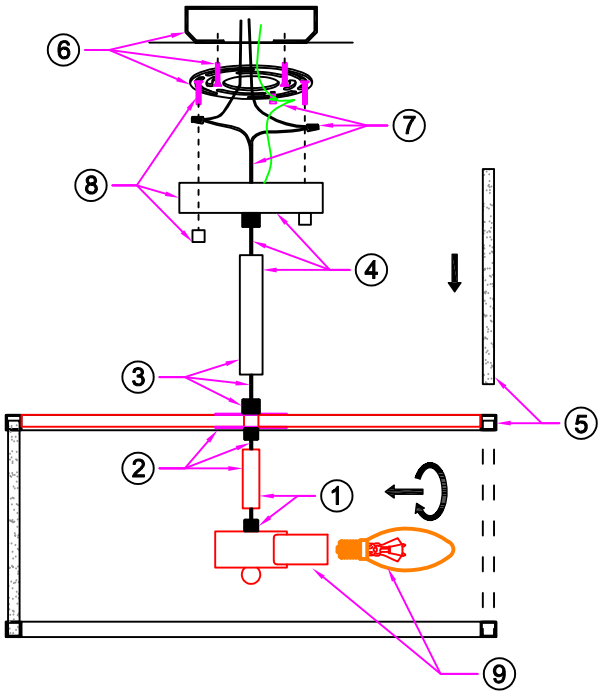

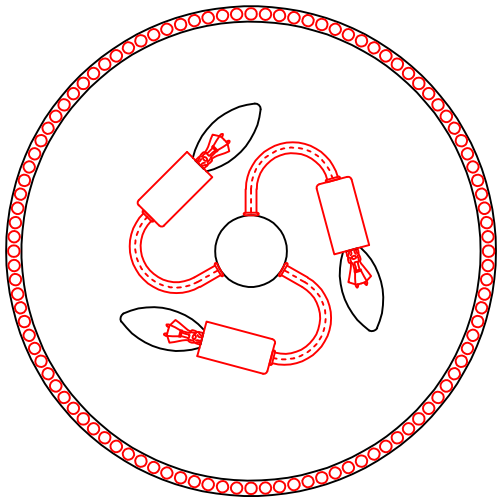

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Feed the fixture wires through the tube, then screw the tube tightly onto the threaded tube.
2. Feed the fixture wires through the light frame, then screw the tube tightly onto the light frame.
3. Feed the fixture wires through the tube, then screw the tube tightly onto the light frame.
4. Feed the fixture wires through the ceiling canopy, then screw the ceiling canopy tightly onto the tube.
5. Insert the glass rods from the top of the fixture body into the holes on the fixture ring.
6. Secure the mounting plate tightly inside the junction box using mounting plate screws.
7. Connect the wires using the wire caps as follows:
Connect the fixture's BLACK wire to the home LIVE/HOT wire.
Connect the fixture's WHITE wire to the home NEUTRAL wire.
Connect the fixture's GROUND wire to the home GROUND wire to the mounting plate with the green screw.
*Note: Ensure no wire strands are exposed.
8. Place the ceiling canopy over the mounting plate, then tighten the decorative nut to secure the ceiling canopy.
9. Screw the bulb into the lamp holder as shown in the diagram, then test the light.