
Assembly & Installation Instructions

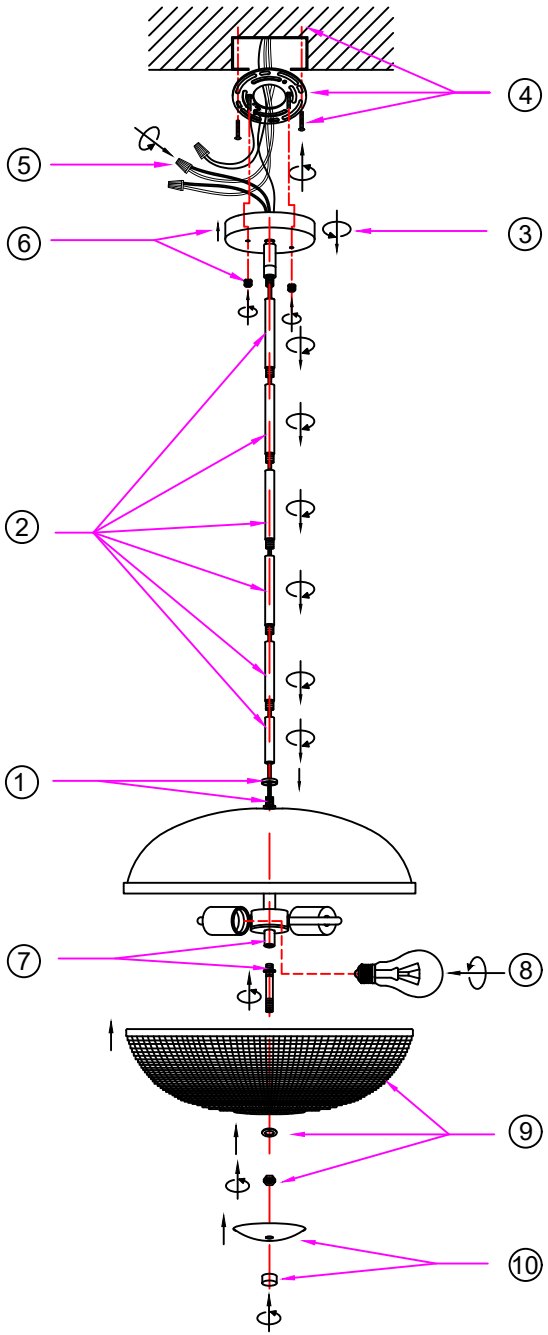

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Slide the tube cover over the threaded rod of the light fixture.
2.Thread the wire through the suspension rods and screw the rods onto the light fixture as needed to adjust the height.
3.Screw the canopy onto the suspension rods.
4.Secure the mounting plate to the junction box using the screws.
5.Connect the wires using the wire caps (E) as follows:
Connect the fixture's **BLACK** wire to the home **LIVE/HOT** wire.
Connect the fixture's **WHITE** wire to the home **NEUTRAL** wire.
Connect the fixture's GREEN wire to the home **GROUND** wire to the mounting plate with the green screw.
Note: Ensure no wire strands are exposed.
6.Secure the canopy to the mounting plate using the knob caps.
7.Screw the threaded rod onto the lamp body connector.
8.Install the bulbs into the lamp holder.
9.Lift the glass lampshade, slide it over the threaded rod, add the rubber washer, then secure the glass lampshade to the lamp body with a nut.
10.Slide the metal washer over the threaded rod and screw on the metal bead.
11.Restore the power to check if the light works properly.