
Assembly & Installation Instructions

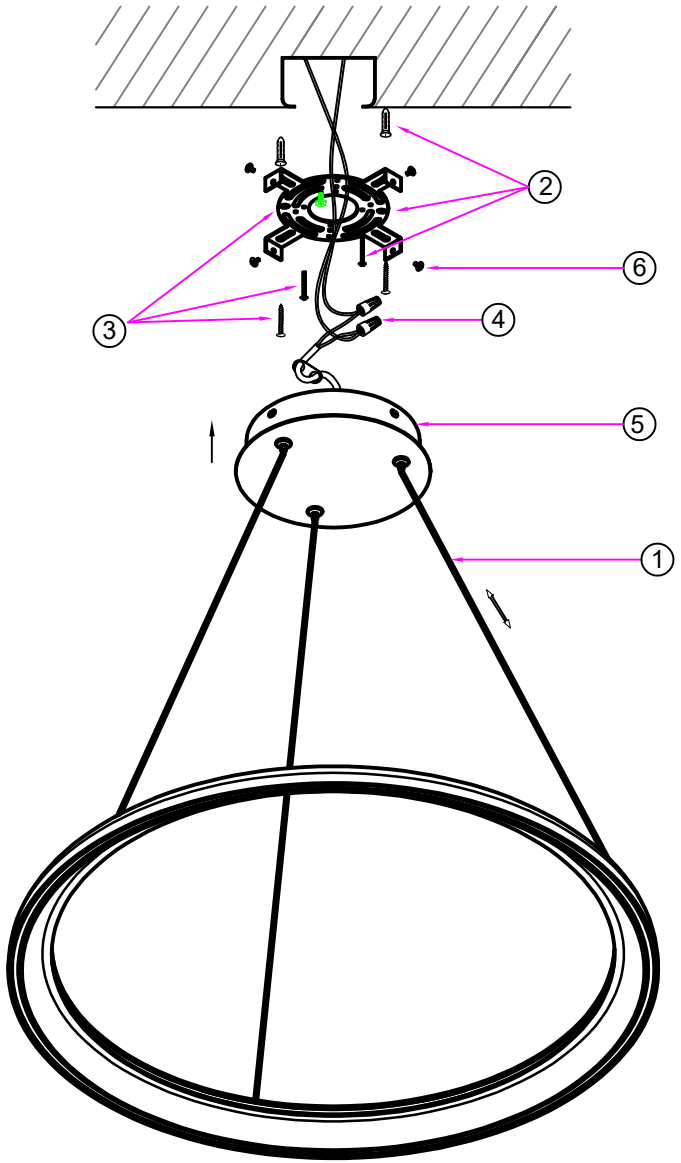

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Adjust Suspension Cable
Hold the cable gripper and adjust the suspension cable to the desired length. Then position the two-hole looping cord grip at the bottom inside the canopy to prevent the cable from being pulled.
Step 2:Mark & Drill Holes
Mark: Temporarily fix the mounting bracket to the junction box. Mark the positions of the reinforcement holes on the ceiling.
Drill: Remove the bracket, drill four appropriately sized holes at the marked positions, and insert the plastic anchor.
Step 3:Secure Bracket
Reattach the mounting bracket to the junction box with screws,then reinforce it using self-tapping screws (sharp point).
Step 4:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Live/Hot (L) to Live/Hot (L);
-Neutral (N) to Neutral (N);
-Ground(G) wire to the grounding terminal.
Caution: Ensure no wires are exposed during the wiring.
Steps 5-6:Secure Fixture
Lift the fixture upward, align it with the mounting bracket holes, and secure it to the bracket using screws.
Installation is complete