
Assembly & Installation Instructions

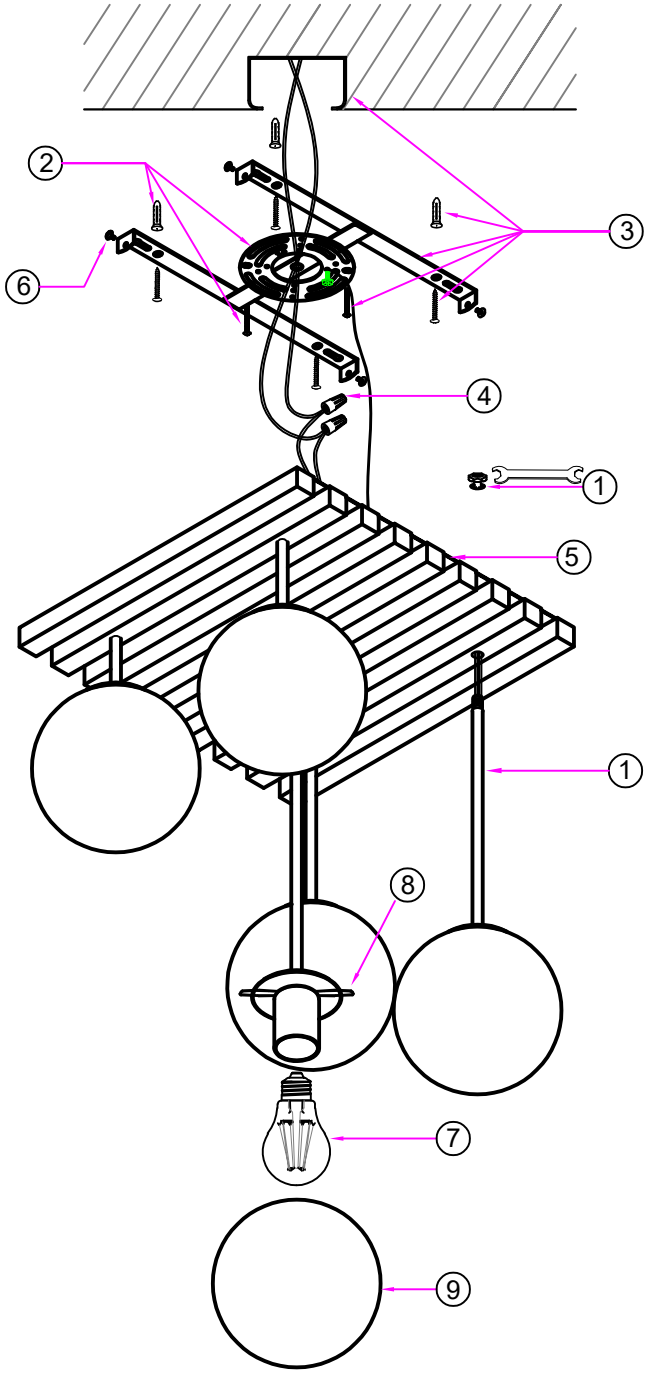

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Assemble Fixture Body
Secure the downrod tube to the canopy using the nut and internal tooth lock washer.
Step 2:Mark & Drill Holes
Mark: Temporarily fix the mounting bracket to the junction box. Mark the positions of the reinforcement holes on the ceiling.
Drill: Remove the bracket, drill four appropriately sized holes at the marked positions, and insert the plastic anchor.
Step 3:Secure Bracket
Reattach the mounting bracket to the junction box with screws,then reinforce it using self-tapping screws (sharp point).
Step 4:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.
Steps 5-6:Attach Ceiling Canopy
Cover the mounting bracket with the ceiling canopy and secure it using the nuts.
Step 7:Install Bulb
Install the bulb (bulb not included).
Steps 8-9:Install Glass Shade
Compress the metal wire belt clip inside the ball shade holder inward, then insert and secure them into the opening of the glass shade.
Installation is complete.