
Assembly & Installation Instructions

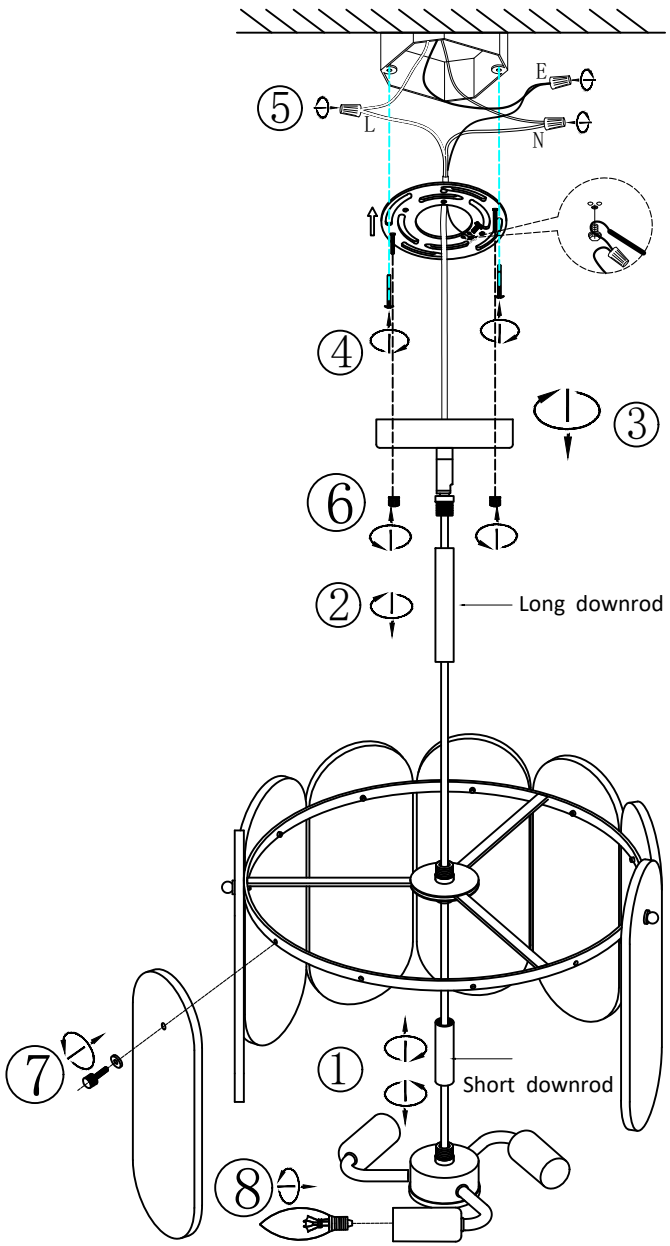

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Thread the main power wire/ground wire through short downrod and the flat iron ring, then tighten short downrod and secure it to the lamp base assembly and the flat iron ring
2.Thread the main power wire/ground wire through the long downrod, then tighten the long downrod securely to the lamp body.
3.Route the main power wire/ground wire through the canopy swivel assembly, then tighten the swivel joint onto the long downrod (suitable for sloped ceilings).
4.Secure the mounting bracket to the U.S. standard junction box using the screws.
5.Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground to Ground via the green grounding screw on the mounting bracket.
Caution:Ensure no wires are exposed during the wiring.
6.Cover the mounting bracket with the ceiling canopy and secure it using the nuts.
7.Install and tighten the glass shade onto the fixture using nuts.
8.Install the bulb (bulb not included).
Installation is complete