


Assembly & Installation Instructions

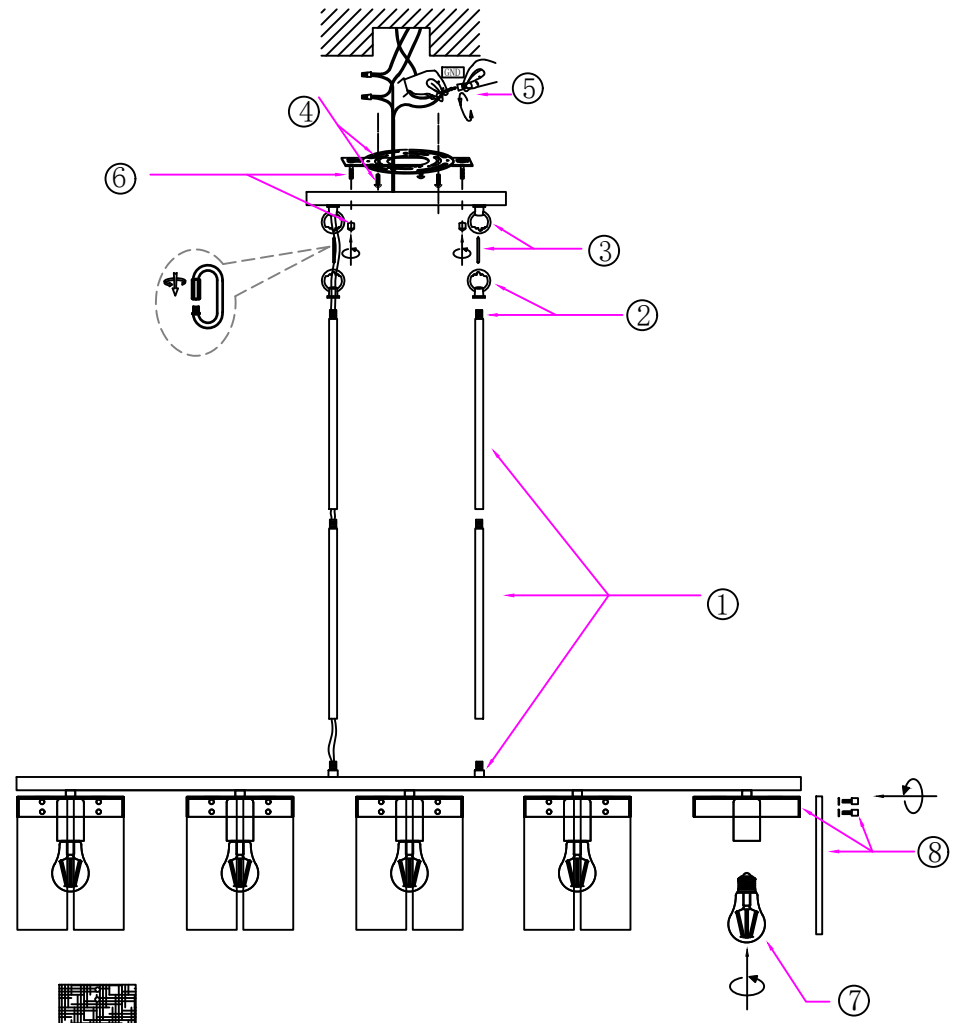



Hang the glass panels with their textured surface facing outward.

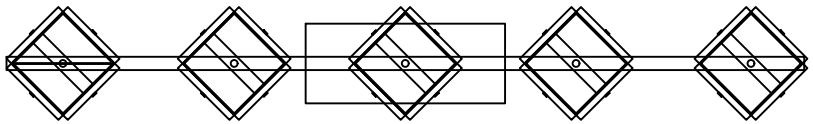

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Thread the straight rod through fixture wires and ground wire, then screw it tightly onto the fixture frame. (The rod length can be adjusted as needed.)
2.Screw the hanging ring firmly onto the opposite end of the straight rod.
3.Connect the fixture hanging ring and ceiling canopy hanging ring with a safety clasp, then feed fixture wires and ground wire through the ceiling canopy.
4.Secure the mounting plate tightly to the junction box with screws.
5.Connect the wires using the wire caps as follows:
Connect the fixture's LIVE/HOT (Black or Marked L) wire to the home LIVE/HOT wire.
Connect the fixture's NEUTRAL (White or Marked N) wire to the home NEUTRAL wire.
Connect the fixture's GROUND (Green or Copper) wire to the home GROUND wire to the mounting plate with the green screw.
***Note:** Ensure no wire strands are exposed.
6.Place the ceiling canopy over the mounting plate and lock it in place by tightening the decorative nut.
7.Install the bulb (Bulb not included).
8.Mount glass panels onto the fixture frame and fasten them with decorative metal fittings. Adjust the tightness of the two adjusting nuts to level and align the glass panels. Hang the glass panels with their textured surface facing outward.
9.Turn on the power and verify the light operates normally. Installation complete.