
# Assembly & Installation Instructions

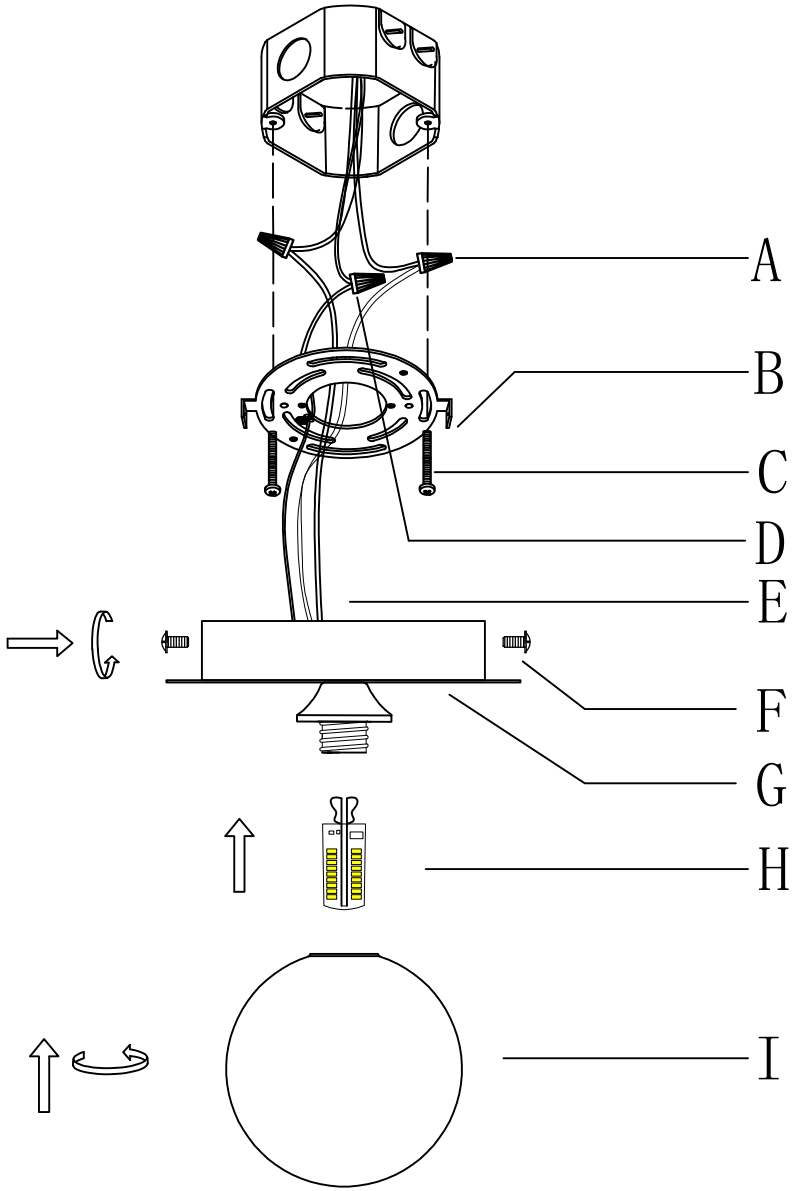


## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

1. Secure the mounting bracket (B) to the junction box using screws (C).
2. Connect the wires (D) using wire connectors (A) as follows:
Connect the Black wire of the main wire to the LIVE wire.
Connect the White wire to the NEUTRAL wire.
Secure the fixture ground wire (E) and external ground wire with green screws.
3. Secure the ceiling canopy (G) to the mounting bracket (B) with flat-head screws (F).
4. Install the bulb (H) (NOT included) onto the socket as indicated.
5. Fasten the glass lampshade (I) onto the lamp socket. Align the threads properly and tighten the shade securely, pay attention not to over-tighten.
6. Turn on the power to test for proper operation.