
Assembly & Installation Instructions

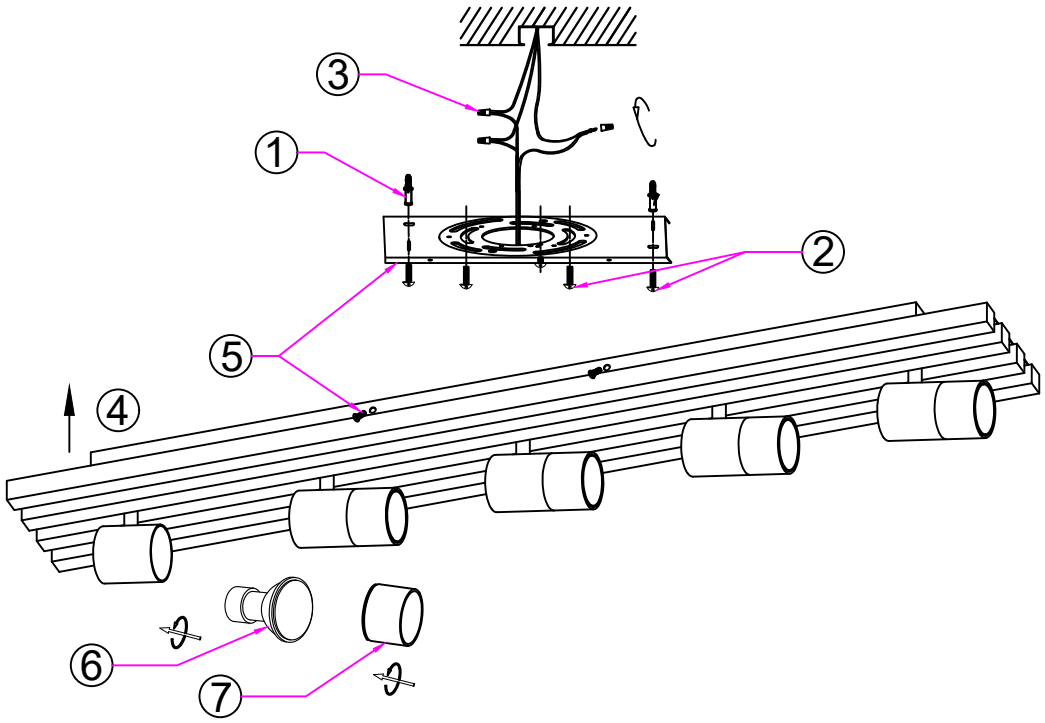

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Mark the positions of the bracket's reinforcement holes on the ceiling and drill two appropriately sized holes at the marked spots, then insert wall anchors into the drilled holes.
2.Secure the mounting bracket to the junction box with screws, and reinforce the bracket using self-tapping pointed screws.
3.Connect the wires using wire connectors as follows:
Connect the Black wire of the main wire to the LIVE wire.
Connect the White wire to the NEUTRAL wire.
Secure the fixture ground wire and external ground wire with green screws.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
4-5. Fasten the ceiling canopy to the mounting bracket with nuts.
6.Install the GU10 bulbs (NOT included) onto the socket as indicated.
7.Tighten the aluminum trim rings to lock them onto aluminum lampshades.