

Assembly & Installation Instructions

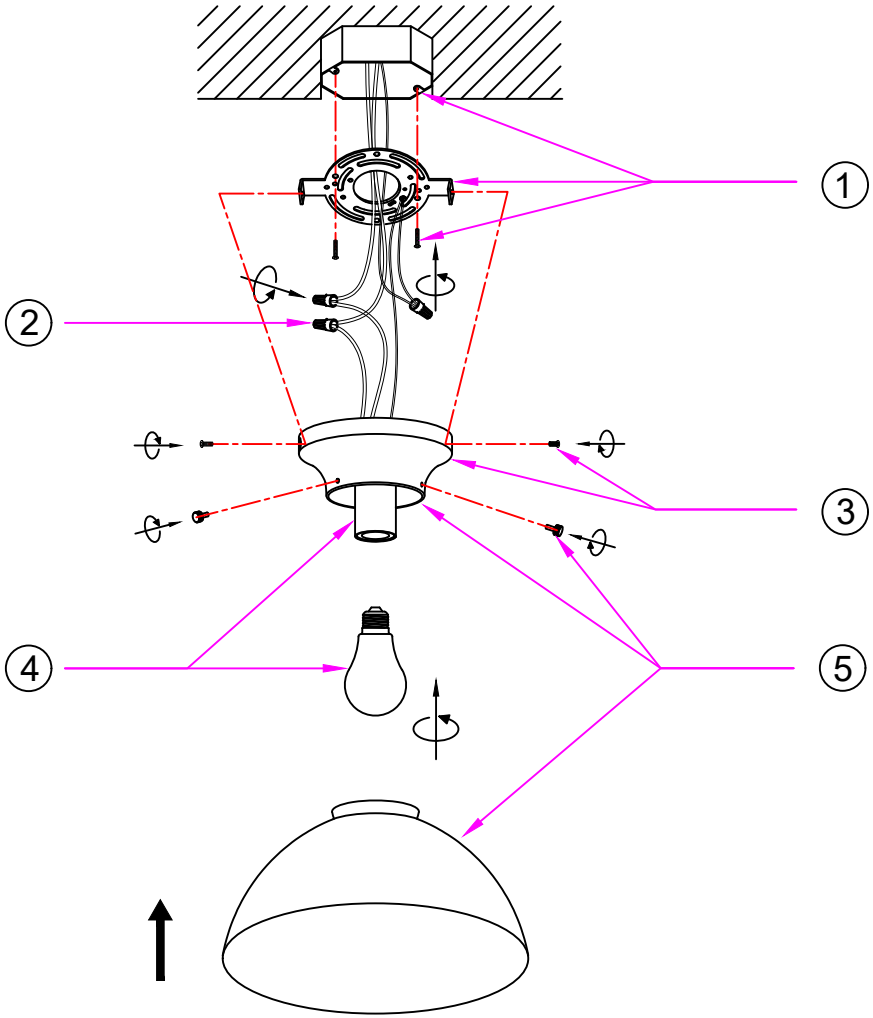

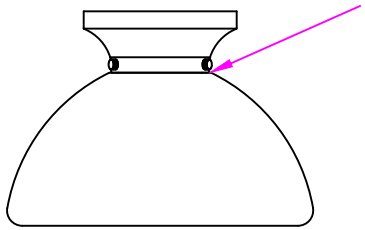

Important: Make sure the glass shade is securely tightened. After proper installation, the gap between the glass shade and the ceiling canopy should be very small (less than 2 mm). If the gap is too large, the glass shade is not properly secured and must be tightened again.

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Secure the Mounting Plate
Attach and tighten the mounting plate to the U.S. standard junction box using the provided screws.
Step 2: Connect the Wiring
Use wire nuts to connect the fixture wires to the pre-installed house wiring as follows:
Black (hot) wire → Black (hot) supply wire (L)
White (neutral) wire → White (neutral) supply wire (N)
Ground wire → Ground terminal
Caution: Ensure all wire connections are secure and no bare wire is exposed outside the wire nuts.
Step 3: Secure the Ceiling Canopy
Attach the ceiling canopy to the mounting plate and secure it using the provided screws.
Step 4: Install the Light Bulb
Install the light bulb into the socket. (Bulb not included.)
Step 5: Install and Secure the Glass Shade
Lift the glass shade into the inside of the ceiling canopy. Make sure the top edge of the glass shade opening is fully in contact with the bottom of the canopy. Then tighten the three thumb screws from the side of the canopy to secure the glass shade in place.
Step 6: Restore Power and Test
Turn on the power and verify that the light bulb is operating properly.
Installation Complete