
Assembly & Installation Instructions

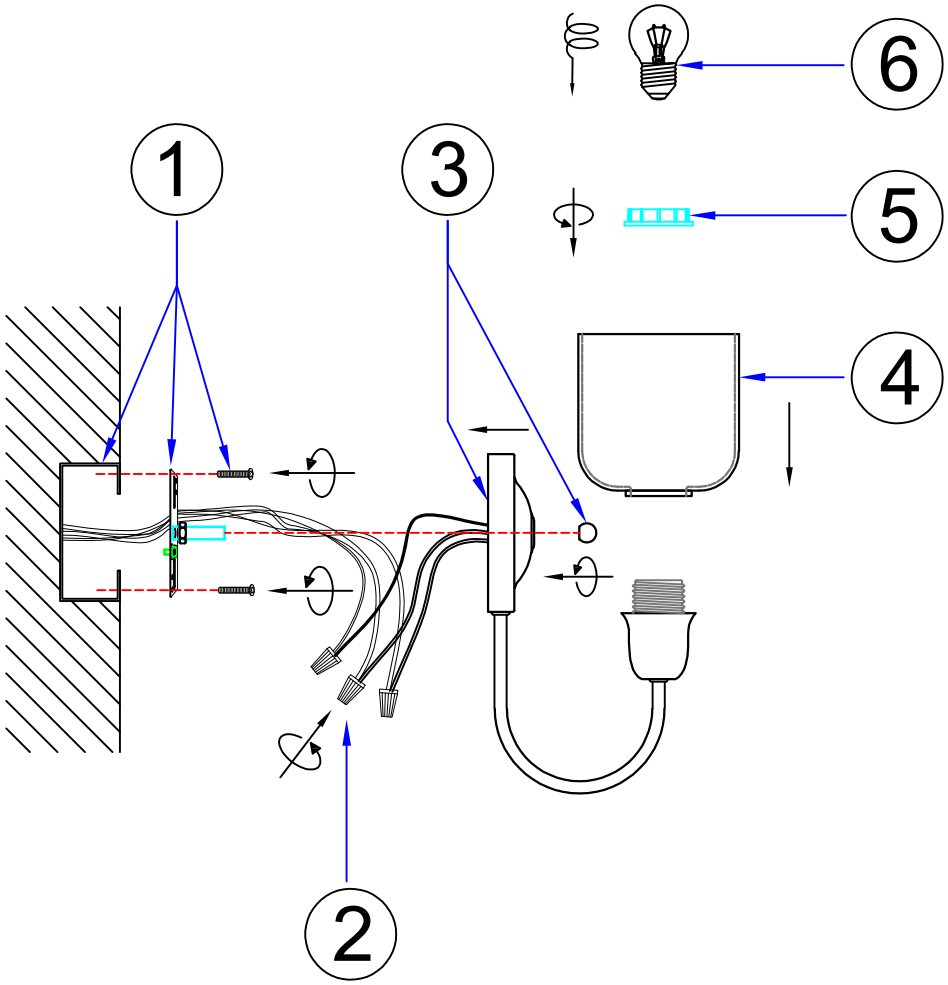

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Secure the mounting bracket to the junction box using 2 mounting screws.
2. Connect the wires using wire connectors as follows:
Fixture BLACK wire (or with an “L” sign) to Home LIVE/HOT wire.
Fixture WHITE wire (or with an “N” sign) to Home NEUTRAL wire.
Fixture GROUND wire to Home GROUND wire. (Loop Fixture ground wire around grounding screw and tighten first.)
NOTE:The bare wire can NOT be exposed to prevent leakage.
3. Make sure all the wire connections are done, then carefully tuck the wires into the junction box. Align the canopy with the mounting bracket and secure with cap nuts.
4-5. Cover the glass shade over the socket and secure with a socket ring.
6. Install bulb(not included).
Return power to test the light fixture.