
Assembly & Installation Instructions

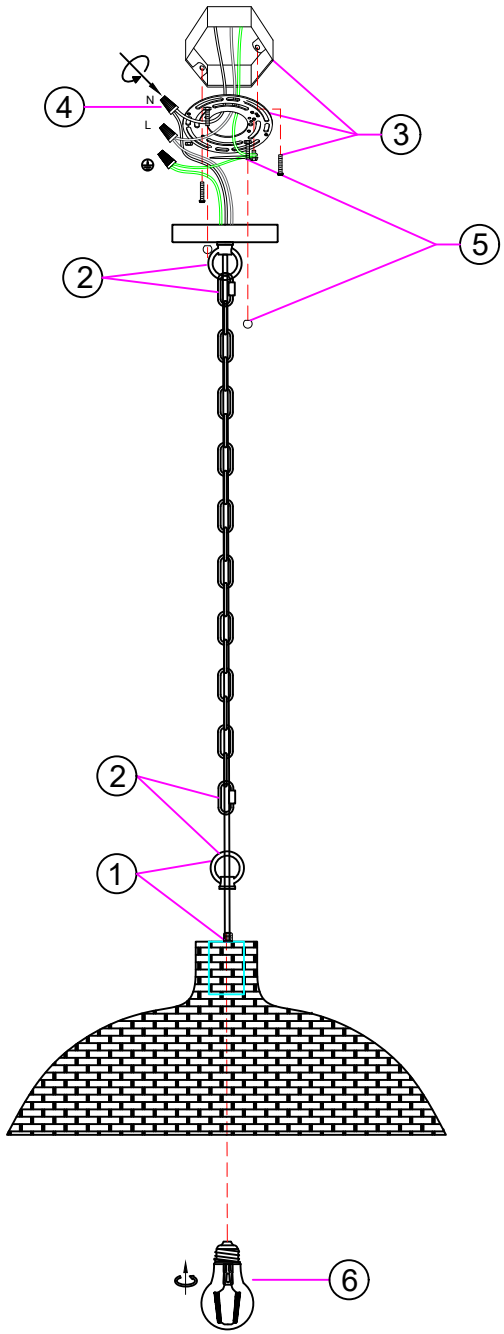

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Tighten the collar loop to the top of the fixture.
2.Connect hanging chain to fixture and canopy loops using quick links. Adjust the chain length as needed. Feed the wires through the chain and the center hole of the canopy.
3.Attach the mounting bracket securely to the junction box with screws.
4.Connect the wires using the wire caps as follows:
Connect the fixture **POSITIVE** wire (marked with "L" or printed text) to the home **HOT** wire.
Connect the fixture **NEGATIVE** wire (marked with "N" or no text) to the home **NEUTRAL** wire.
Secure the fixture ground wire and the external ground wire to the mounting bracket with a green screw, then use a wire cap to connect the fixture ground wire to the external ground wire.
Note: Ensure no bare wire is exposed to prevent leakage.
5.Place the canopy over the mounting bracket. Secure the canopy with the decorative nuts.
6.Install the E26 bulb (not included) onto the lamp holder.
7.Turn on the power and check that the bulb works properly.