
Assembly & Installation Instructions

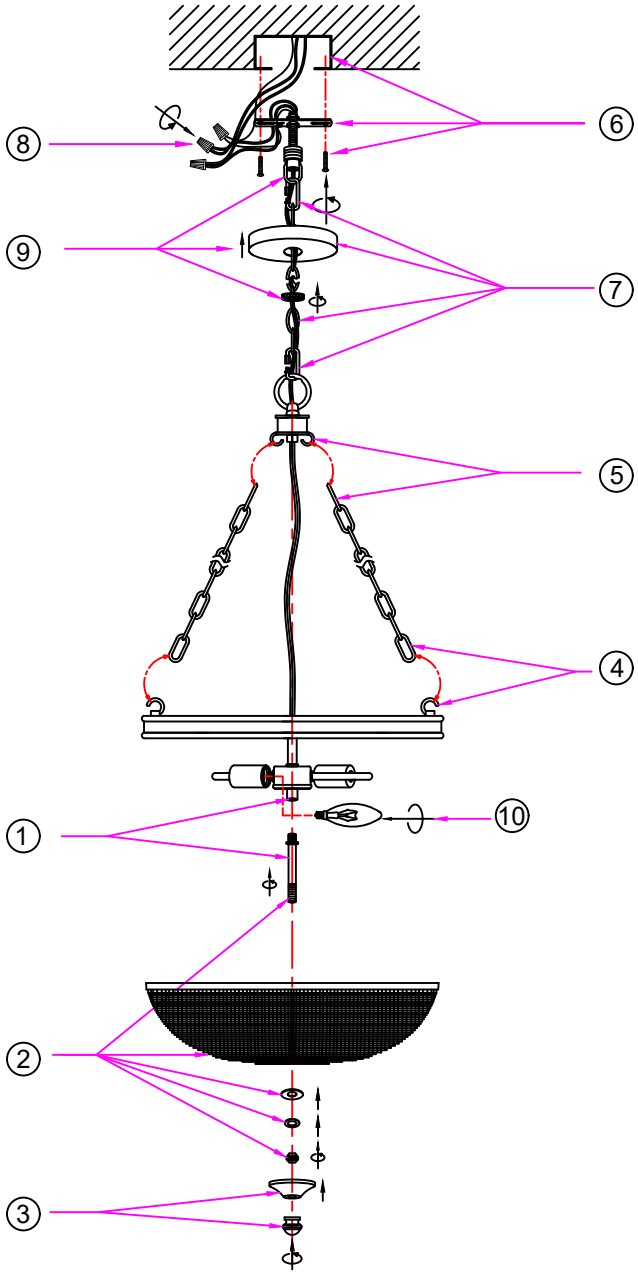

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Screw the stem into fixture body and adjust its position as needed.
2.Slide the glass shade onto the stem，followed by the washers，and secure with nut.
3.Secure the bottom cap with the finial.
4.Attach the side chains to the fixture frame.
5.Attach the side chains to the top loop.
6.Secure the mounting bracket to the junction box with screws.
7.Adjust the chain length, slide the canopy and collar ring over the chain and wires, then connect the chain ends with the quick links and tighten them.
8.Connect the wires using the wire nuts (ensure no bare wires are exposed):
Connect the fixture wire labeled L to the Black (Live) supply wire.
Connect the fixture wire labeled N to the White (Neutral) supply wire.
Wrap the fixture ground wire around the green grounding screw on the mounting bracket, then connect it to the house ground wire.
Carefully tuck all wires back into the junction box.
9.Tighten the collar ring to secure the canopy.
10.Install the light bulbs (not included).
11.Restore power and test the fixture.
Installation complete.