
# Assembly & Installation Instructions

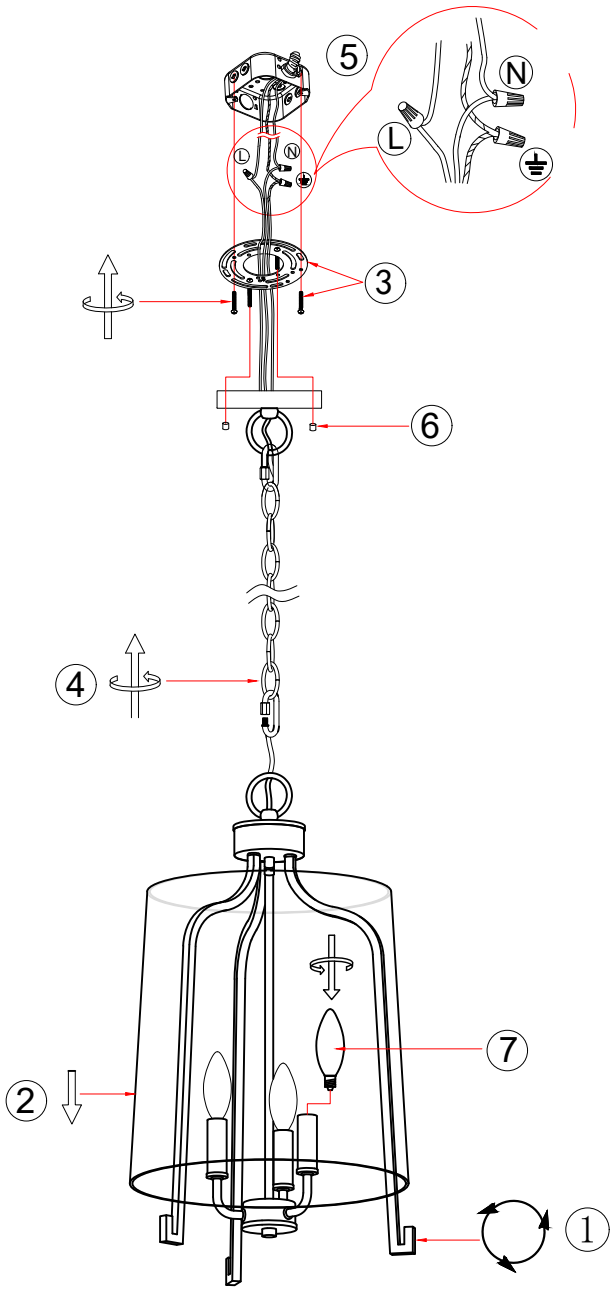


## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

1.Rotate three bent pipes into evenly spaced positions.
2.Insert the glass lampshade from the top of the fixture onto the hooks of three bent pipes.
3.Secure the mounting bracket to the US-standard junction box with screws.
4.Connect the suspension chain to the fixture hanging ring and canopy loop using quick-connect links. Adjust the chain length as needed, then route the fixture wires and ground wire through the hanging chain and the center hole of the ceiling canopy.
5.Connect the wires using wire connectors as follows:
Connect the Black/Live wire of the main wire to the LIVE wire.
Connect the White/Neutral wire to the NEUTRAL wire.
Connect the fixture ground wire to house Ground wire.
Secure the fixture ground wire and the house ground wire to the mounting bracket with green screws.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
6.Secure the ceiling canopy to the mounting bracket with decorative nuts.
7.Install the bulbs (NOT included) onto the socket as indicated.
8.Turn on the power to test for proper operation.