
Assembly & Installation Instructions

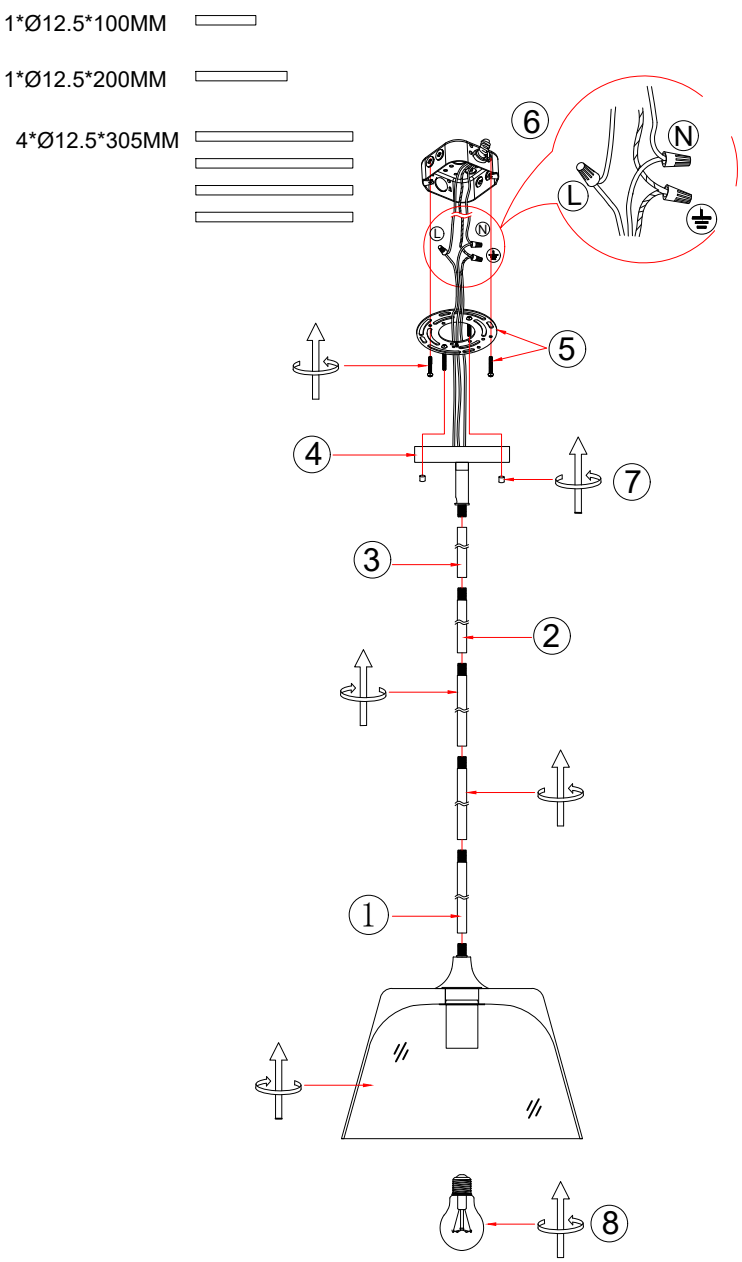

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Steps 1-3:Assemble the Downrods
Feed the fixture wires through the downrods, then thread the downrods together and securely attach them to the fixture body.
(The downrod sections can be combined to achieve the desired hanging length.)
Step 4:Install the Swivel and Canopy
Feed the wires through the canopy and swivel assembly. Then thread the swivel onto the top downrod and tighten securely.
(The swivel allows installation on sloped ceilings.)
Step 5:Mount Bracket
Secure the mounting bracket to the U.S. standard junction box using the mounting screws.
Step 6:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground to Ground via the green grounding screw on the mounting bracket.
Caution:*Ensure no wires are exposed during the wiring.*
Step 7:Attach Ceiling Canopy
Cover the mounting bracket with the ceiling canopy and secure it using the decorative nuts.
Step 8:Install Bulb
Install the bulb (bulb not included).
Step 9:Power Test
Turn on the power and verify that the bulb is functioning properly.
Installation is complete