
Assembly & Installation Instructions

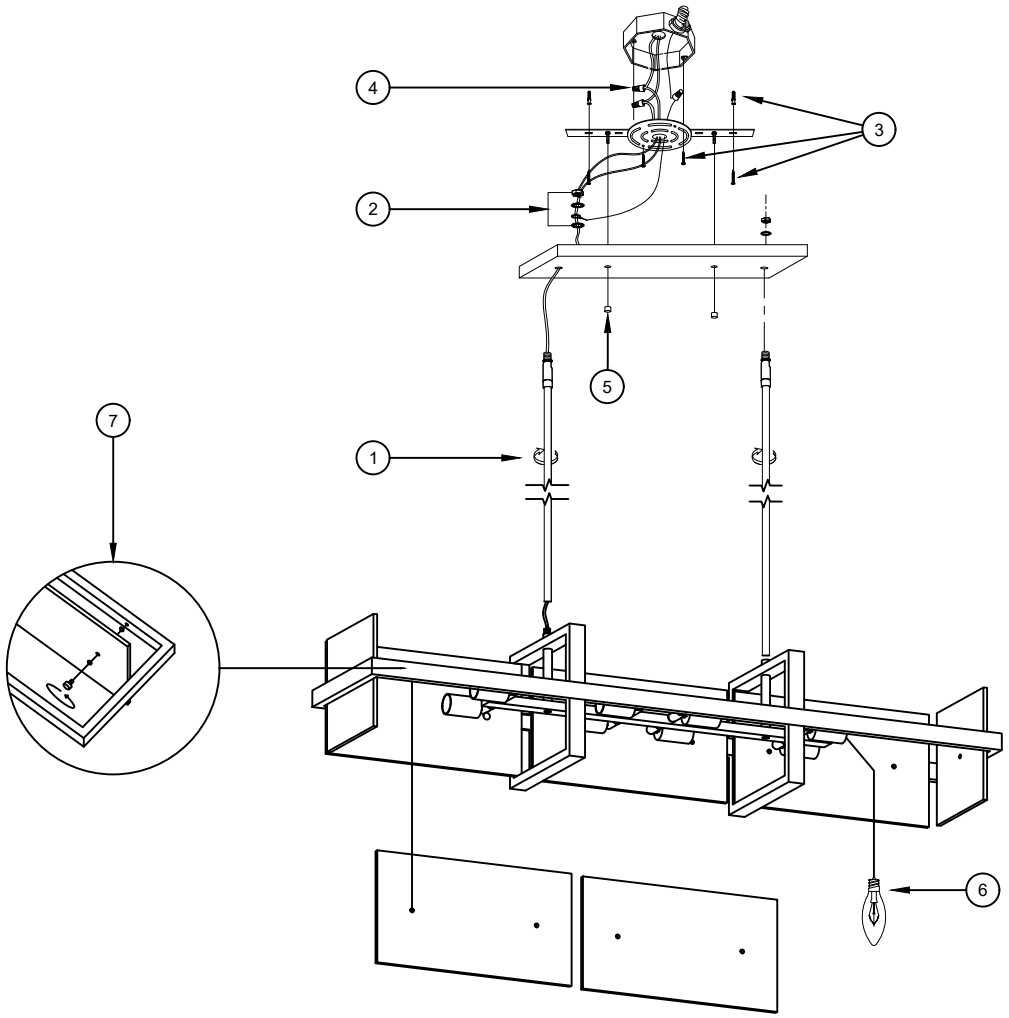

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Feed the wires through the downrods, then screw the downrods securely onto the fixture body. (Downrods can be connected to adjust the hanging height.)
2.Secure the sloped ceiling adapter and ground wire to the ceiling canopy using the nut and washer.
3.Temporarily attach the mounting bracket to the junction box using the mounting screws. Mark the ceiling through the two holes in the bracket.
Remove the bracket, drill two appropriately sized holes at the marked positions, and insert the anchors.
Reattach the bracket to the junction box using the mounting screws, then secure it to the ceiling with the pointed self-tapping screws through the two holes.
4.Connect the wires by using the wire caps as follows:
Connect the fixture's LIVE wire to the home LIVE (BLACK) wire.
Connect the fixture's NEUTRAL wire to the home NEUTRAL (WHITE) wire.
Secure the fixture's ground wire to the mounting bracket with the green grounding screw, then connect the fixture's ground wire to the home ground wire.
Tuck all wires into the junction box.
Note: make sure no bare wires are exposed to prevent electric leakage.
5.Secure the canopy to the mounting bracket with screws.
6.Install the bulbs (not included).
7.Slide the rubber washer, glass panel, and the second rubber washer onto the thumbscrew in the indicated order. Then secure the glass panel to the fixture with the thumbscrew. Do not overtighten. Allow the glass panel to hang naturally.
8.Restore power and test the fixture.