
Assembly & Installation Instructions

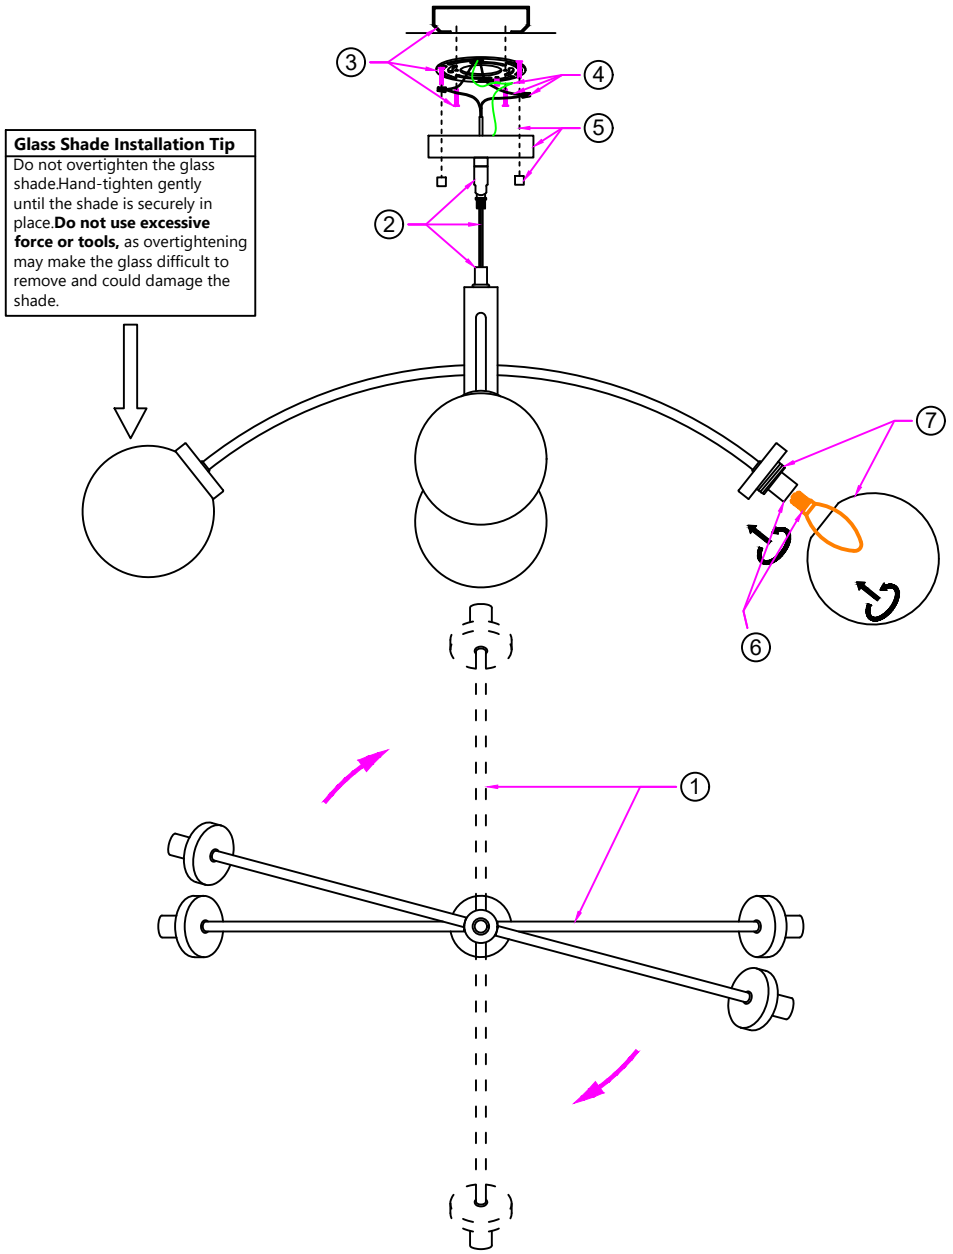

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.As shown in the diagram, adjust the two layers of fixture arms into a cross shape so that all arms are evenly distributed.
2.Feed the fixture wires and ground wire through the canopy and swivel joint assembly, then screw the swivel joint tightly onto the fixture body. (This fixture is suitable for installation on sloped ceilings.)
3.Secure the mounting plate inside the junction box with mounting plate screws.
4.Connect the wires by using the wire caps as follows:
Connect the fixture's LIVE wire to the home LIVE (BLACK) wire.
Connect the fixture's NEUTRAL wire to the home NEUTRAL (WHITE) wire.
Connect the fixture’s GROUND wire to the home GROUND wire to the mounting plate with the green screw.
*Note: Ensure no wire strands are exposed.
5.Place the ceiling canopy over the mounting plate, then tighten and secure it with the decorative nuts.
6.Screw the bulb into the lamp holder (Bulb not included), then turn on the power to test and verify proper lighting.
7.Install the glass shade onto the lamp holder. (Note: Always align the threads properly when installing the glass, and do not over-tighten to avoid jamming or breaking the glass.)