
Assembly & Installation Instructions

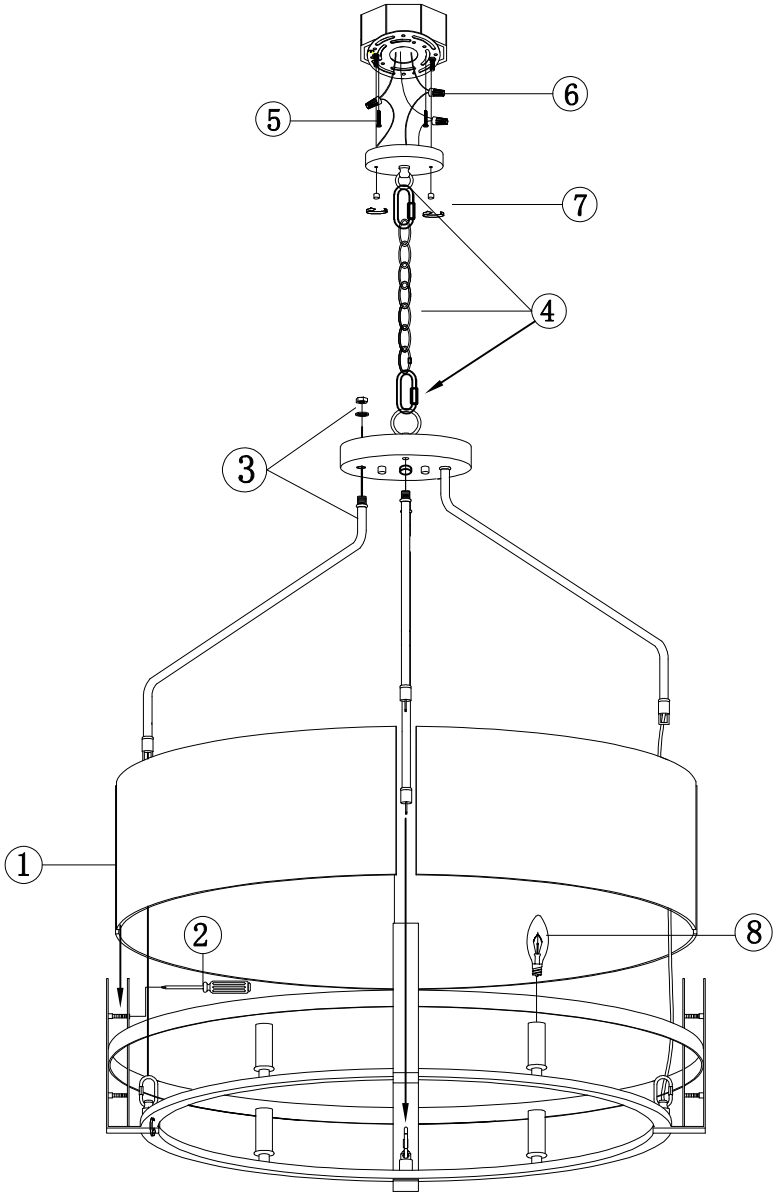

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Insert glass panels into the fixture frame.
2.Adjust the metal retaining bracket to hold the glass, then tighten screws to secure the glass panels.
3.Mount one end of the bent pipe to the ceiling canopy, align to proper position and fasten them using nuts and washers. Attach the other end of the bent pipe to the fixture hanging ring using quick links.
4.Adjust the suspension chain to your desired length, connect the chain to the fixture hanging ring and ceiling canopy hanging ring with quick links; Thread the main power wire through the suspension chain and ceiling canopy.
5.Secure the mounting bracket to the US-standard junction box with bracket screws.
6.Connect the wires using wire connectors as follows:
Connect the Black wire of the main wire to the LIVE wire.
Connect the White wire to the NEUTRAL wire.
Secure the fixture ground wire and external ground wire.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
7.Secure the ceiling canopy to the mounting bracket with nuts.
8.Install the bulbs (NOT included) onto the socket and turn on the power to test for proper operation.