
Assembly & Installation Instructions

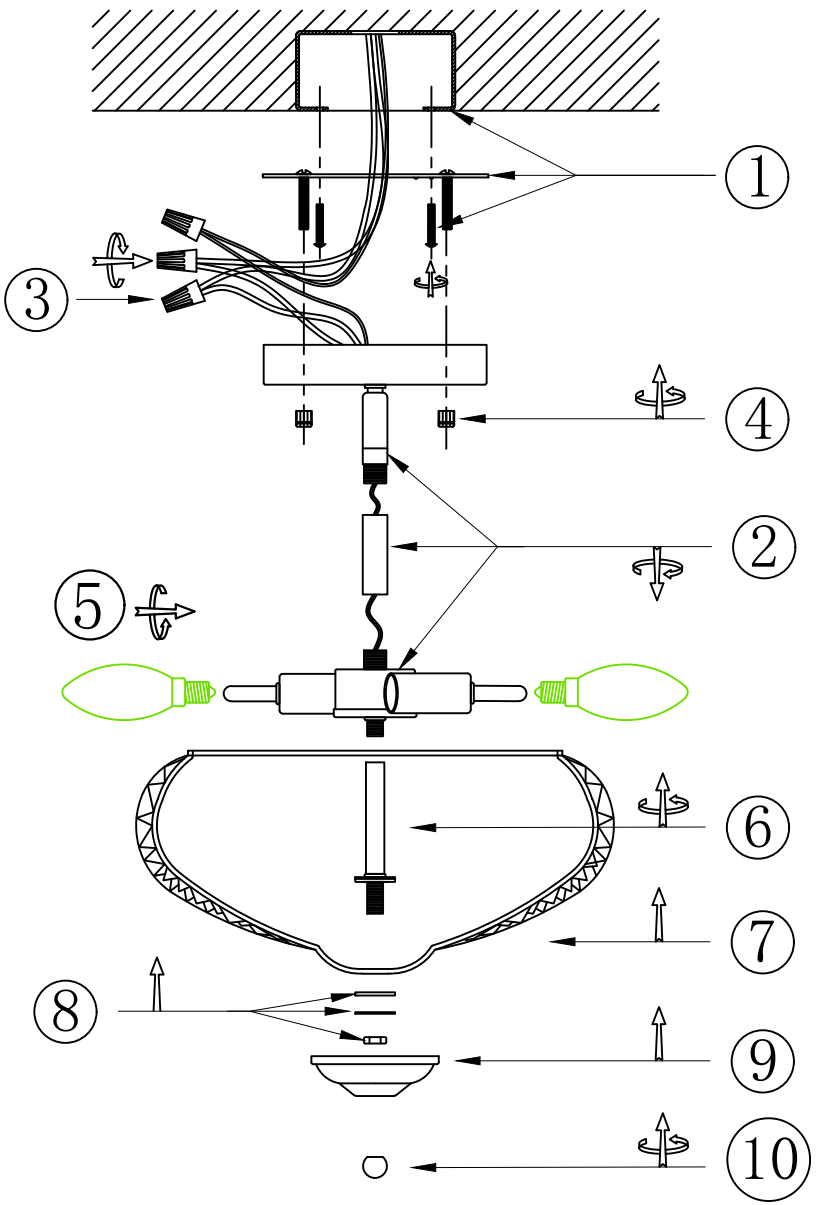

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Attach the mounting bracket securely to the junction box with screws.
2.Thread the wire through the center pipe and ceiling canopy, then connect the 2-light cluster socket to the canopy using the center pipe.
3.Connect the wires using the wire caps as follows:
Connect the fixture BLACK (or marked L) wire to the home LIVE/ HOT wire.
Connect the fixture WHITE (or marked N) wire to the home NEUTRAL wire.
Secure the fixture ground wire and external ground wire to mounting bracket with green screw, then use the wire cap to connect the fixture ground wire to the external ground wire.
*Note: Ensure no bare wire is exposed to prevent leakage.
4.Secure the ceiling canopy to the mounting bracket with decorative nuts.
5.Install the E12 bulbs (not included) onto the lamp holders.
6.Screw the male-to-female threaded rod securely onto the cluster socket.
7.Place the shade onto the threaded rod.
8.Fit the rubber gasket, flat washer, and tighten with the nut in sequence.
9.Place the metal cover over the shade.
10.Secure the metal cover with the finial ball.
11.Turn on the power and check that the fixture works properly. Installation complete.