
Assembly & Installation Instructions

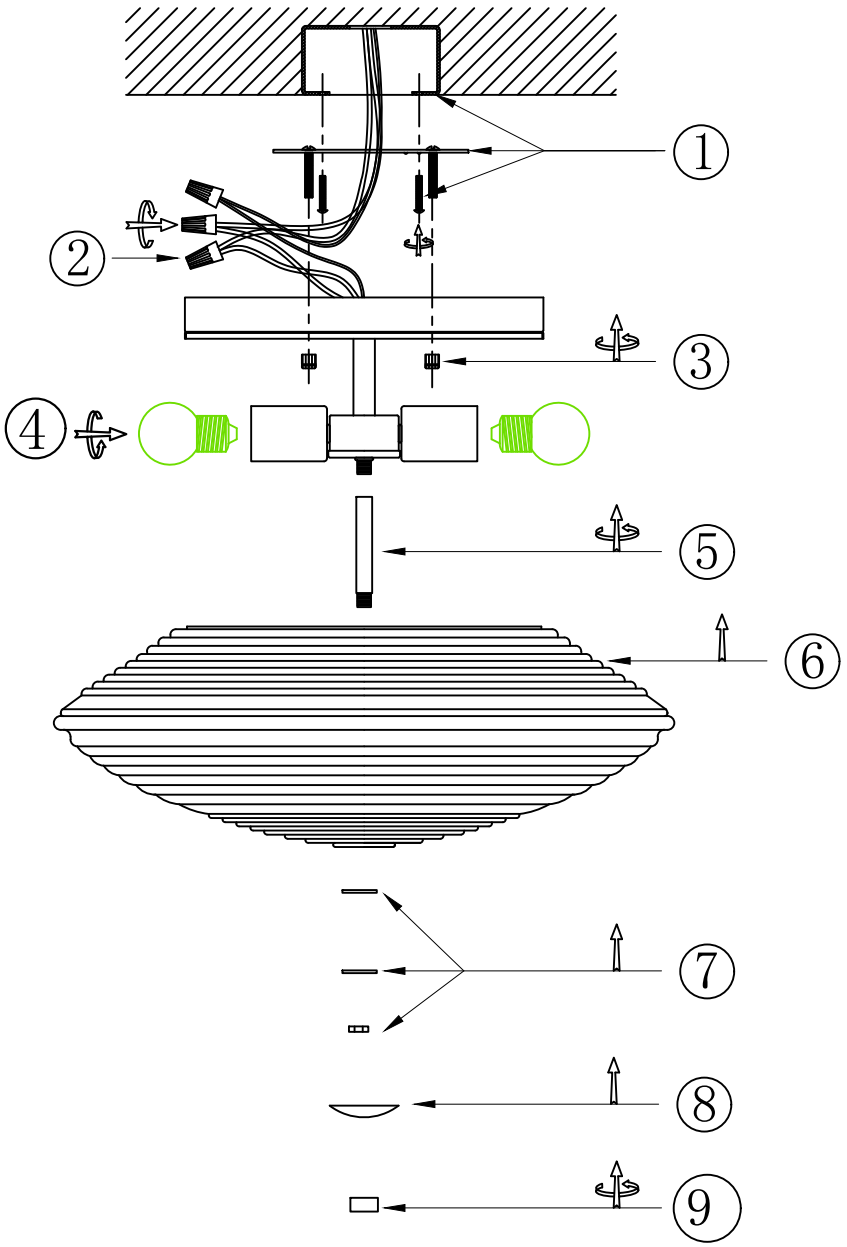

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Secure the mounting bracket to the junction box with screws.
2.Connect the wires using the wire nuts (ensure no bare wires are exposed):
Connect the Black fixture wire to the Black (Live) supply wire.
Connect the White fixture wire to the White (Neutral) supply wire.
Wrap the fixture ground wire around the green grounding screw on the mounting bracket, then connect it to the house ground wire.
Carefully tuck all wires back into the junction box.
3.Secure the canopy to the mounting bracket using the decorative nuts.
4.Install the light bulbs (NOT INCLUDED).
5.Screw the threaded rod into the fixture body.
6.Lift the shade up and slide it over the threaded rod.
7.Slide the rubber washer and metal washer onto the rod, then tighten with the nut.
8.Slide the bottom cap onto the threaded rod.
9.Secure the bottom cap with the finial.
10.Restore power and test the fixture.
Installation Complete.