
Assembly & Installation Instructions

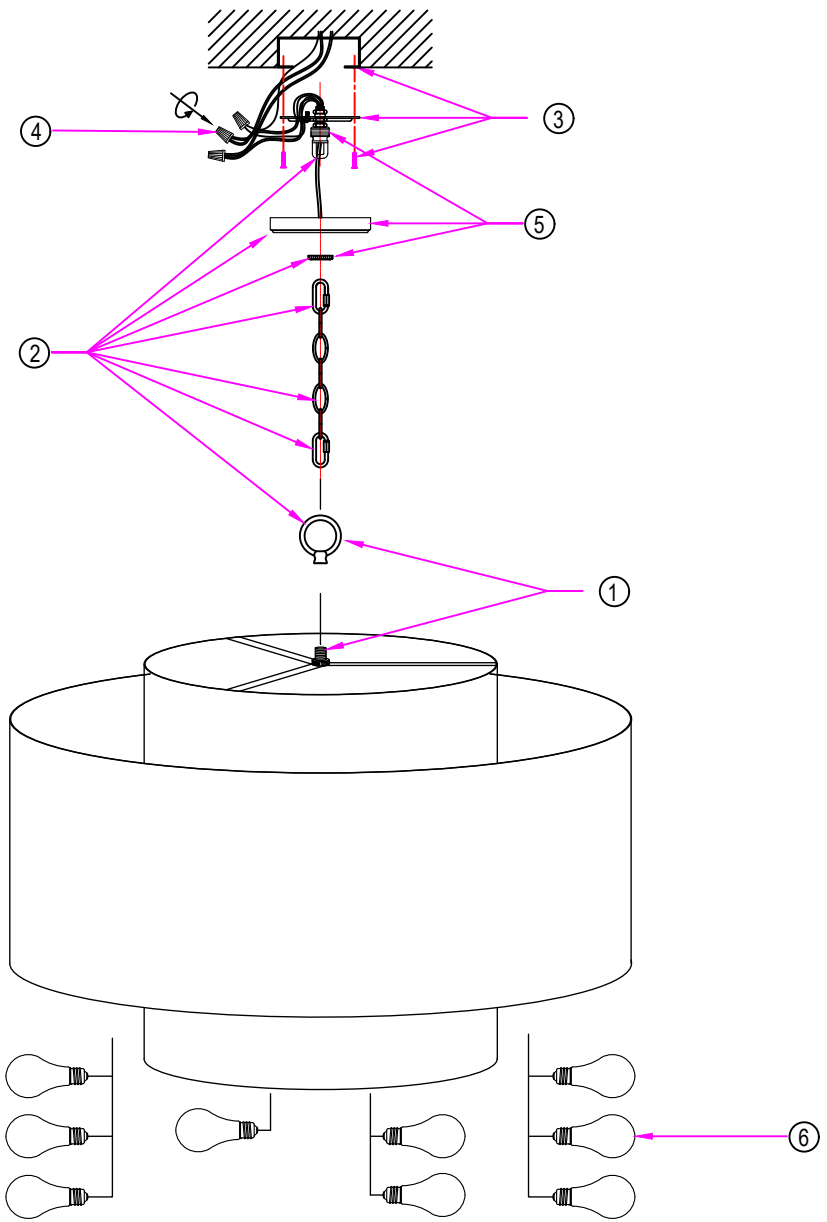

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Attach Loop to Fixture
Thread the fixture wires and ground wire through the loop, then secure the loop to the fixture body.
Step 2:Adjust Chain
Adjust the chain to the required installation height. Then route the fixture wires and ground wire through the chain, threaded outer ring, canopy, and mounting bracket assembly in sequence.
Use a quick link to connect:
-One end to the fixture hanging loop
-The other end to the screw collar loop
Step 3:Mount Bracket
With two people recommended, one supports the fixture while the other secures the mounting bracket to the junction box using screws.
Step 4:Connect Wires
Connect the supply wires to the fixture wires using wire connectors:
-Black(Live/Hot) to Black (Live/Hot);
-White(Neutral) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.
Step 5:Secure Canopy
Carefully tuck all wires into the junction box, then secure the canopy by tightening the threaded outer ring onto the screw collar loop.
Step 6:Install Bulb
Install the bulb (bulb not included).
Step 7:Power Test
Turn on the power and verify that the bulb is functioning properly
Installation is complete