

Assembly & Installation Instructions

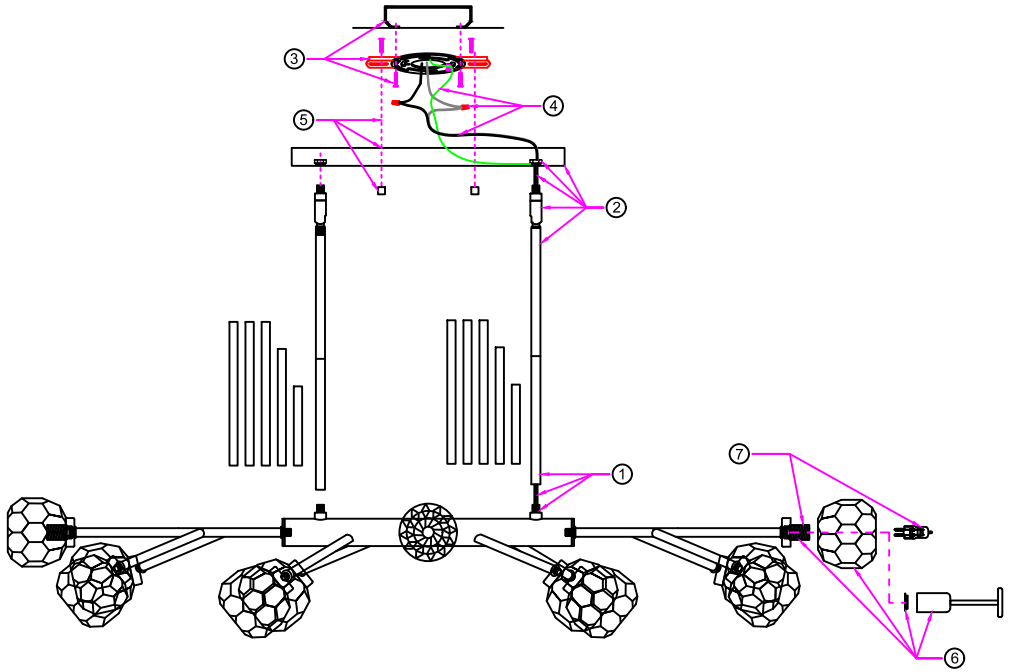

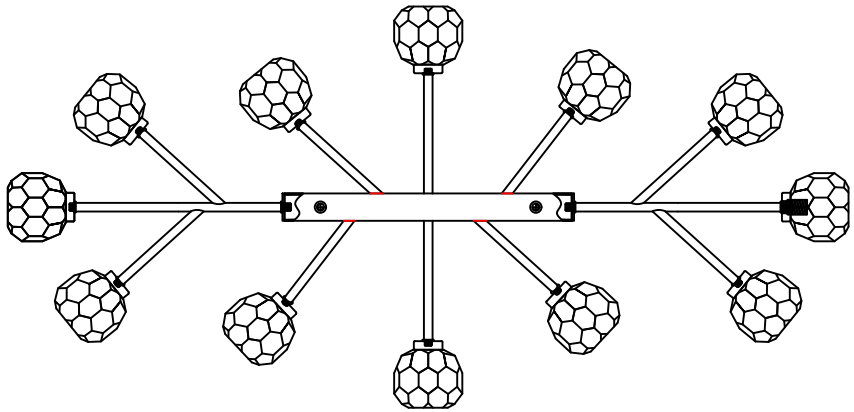

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Assemble the Downrods (Adjust Height)
Select the required number of downrods according to the desired fixture height. Feed the main power wire and ground wire through the downrods, then tighten the downrods onto the threaded rod.
Step 2: Install the Universal Joint and Canopy Assembly
Route the main power wire and ground wire through the universal joint and ceiling canopy. Tighten the universal joint onto the downrod, then use the nut to secure the canopy onto the universal joint.
Step 3: Secure the Mounting Plate
Attach and tighten the mounting plate to the U.S. standard junction box using the provided screws.
Step 4: Connect the Wiring
Use wire nuts to connect the fixture wires to the pre-installed house wiring:
Black wire → Black (hot) wire
White wire → White (neutral) wire
Ground wire → Ground terminal
Note: Make sure no bare wires are exposed outside the wire nuts to prevent electric shock.
Step 5: Secure the Ceiling Canopy
Tighten the ceiling canopy to the mounting plate using the provided decorative cap nuts.
Step 6: Install the Lampshade
Place the lampshade onto the socket. Secure it using the socket ring and tighten it with the socket ring removal tool.
Step 7: Install the Light Bulbs and Test
Insert the light bulbs into the socket according to the markings and turn on the power to verify that the fixture is functioning properly. (Bulbs not included)
Installation Complete