
Assembly & Installation Instructions

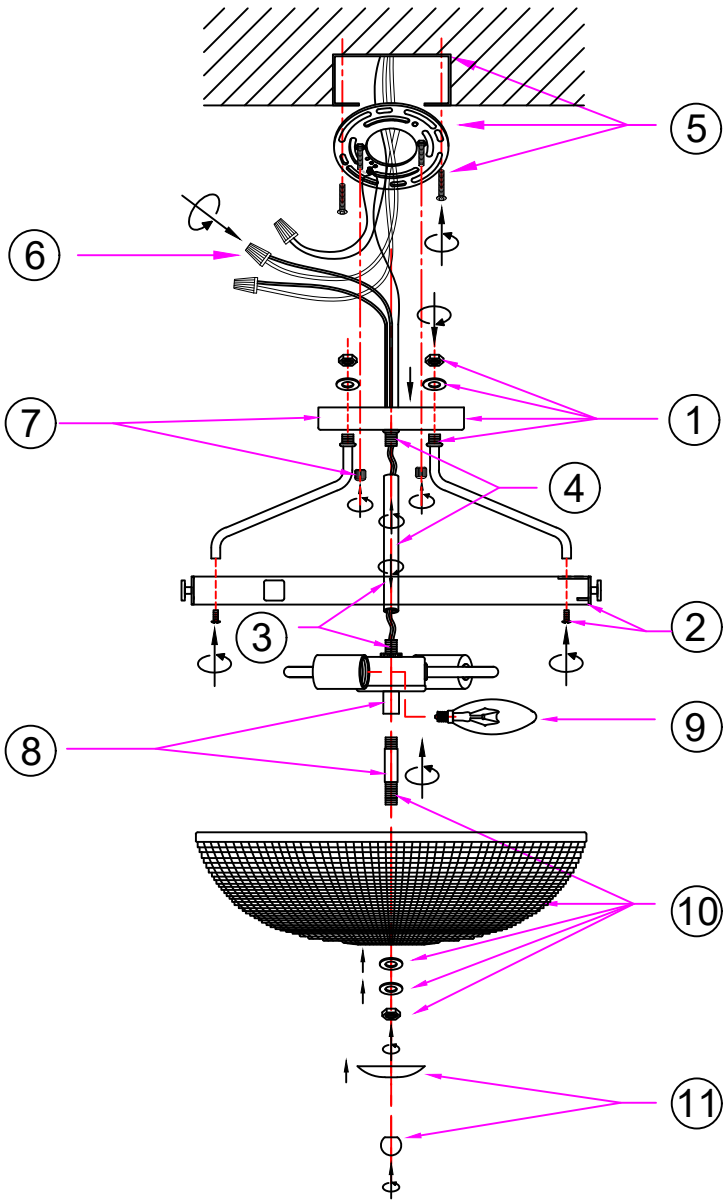

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.


IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Attach Curved Arms to Canopy
Insert the curved arms through the canopy holes. Place the washers on the threaded ends, then tighten the nuts to secure the arms.
Step 2:Attach the Metal Frame
Align the three holes on the metal frame with the threaded holes on the curved arms. Secure the frame with screws.
Step 3:Install the Center Stem
Pass the fixture wires through the center stem, then attach the stem to the fixture body.
Step 4:Attach the Canopy
Pass the wires through the canopy, then secure the center stem to the canopy.
Step 5:Mount Bracket
Secure the mounting bracket to the U.S. standard junction box using the mounting screws.
Step 6:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.

Assembly & Installation Instructions

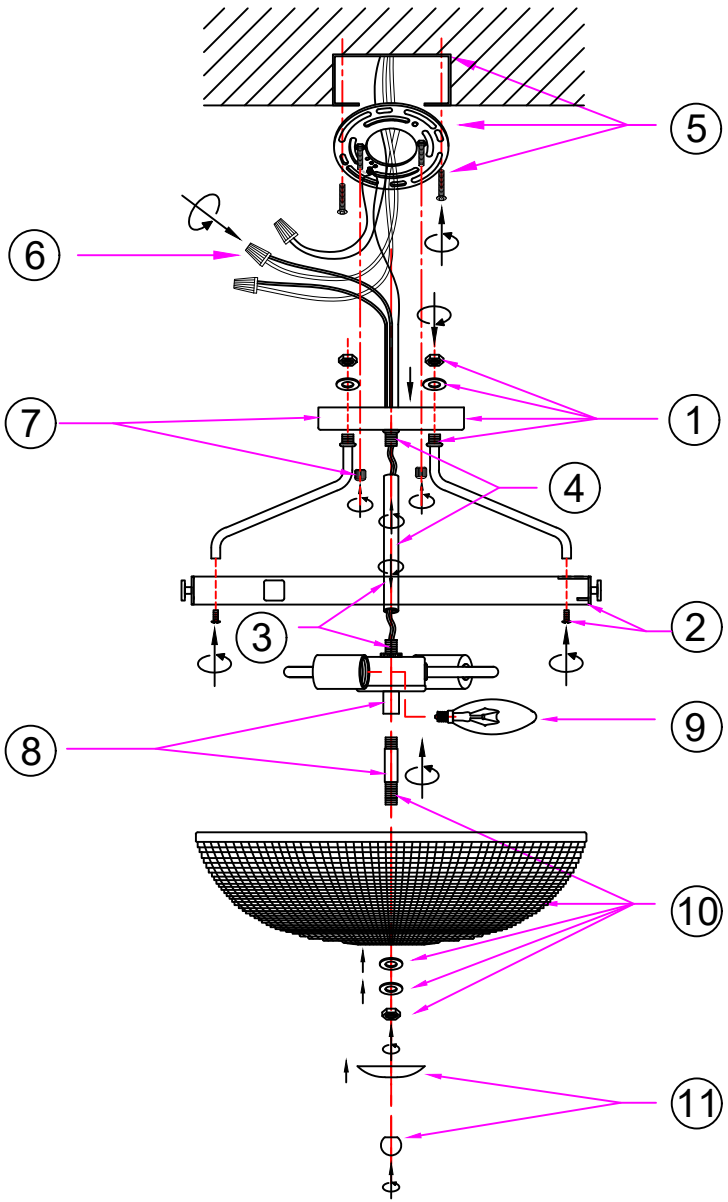

INSTALLATION STEPS:

Step 7:Attach Ceiling Canopy
Attach the canopy to the mounting bracket and secure it with nuts.
Step 8:Attach the Fixture Connector
Screw the center stem into the fixture connector.
Step 9:Install Bulb
Install the light bulb into the socket (bulb not included).
Step 10:Install Lampshade
Place the glass shade onto the center stem,install the metal washer and rubber washer, then tighten the nut to secure the shade.
Step 11:Install the Decorative Cap
Slide the decorative cap onto the center stem, then tighten it with the ball nut.
Step 12:Power Test
Turn on the power and verify that the bulb is functioning properly.
Installation is complete