

Assembly & Installation Instructions

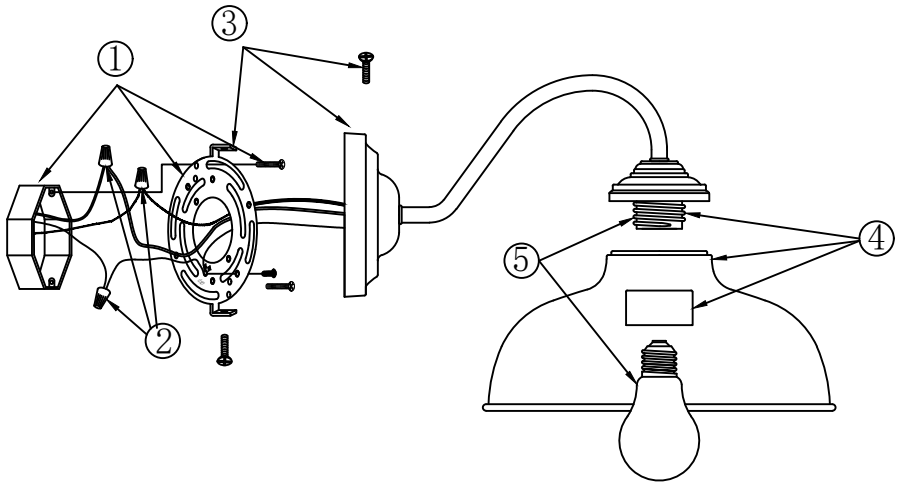

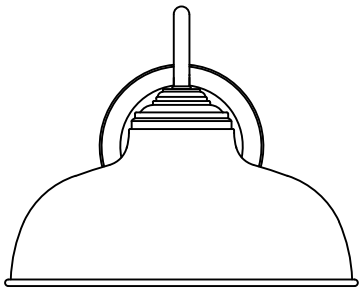

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Install the Mounting Plate
Secure the mounting plate to the U.S. standard junction box using the provided **screws.**
Step 2: Connect the Wiring
Use wire nuts to connect the fixture wires to the house wiring as follows:
Black fixture wire (Hot) → Black house wire (Hot)
White fixture wire (Neutral) → White house wire (Neutral)
Ground wire → House ground wire
Secure the fixture ground wire and house ground wire to the grounding screw on the mounting plate.
Caution: Ensure all wire connections are secure and no bare wire is exposed outside the wire nuts.
Step 3: Secure the Wall Sconce Backplate
Place the backplate flush against the wall. Align the holes on the backplate with the mounting plate, then insert and tighten the screws to secure the wall sconce in place.
Step 4: Install the Metal Shade
Pass the upper opening of the metal shade through the socket, then secure the shade to the fixture body using the socket ring.
Step 5: Install Light Bulb
Install the compatible light bulb. (Bulbs not included.)
Step 6: Restore Power and Test
Turn on the power and verify that the light bulb(s) are operating properly.