
Assembly & Installation Instructions

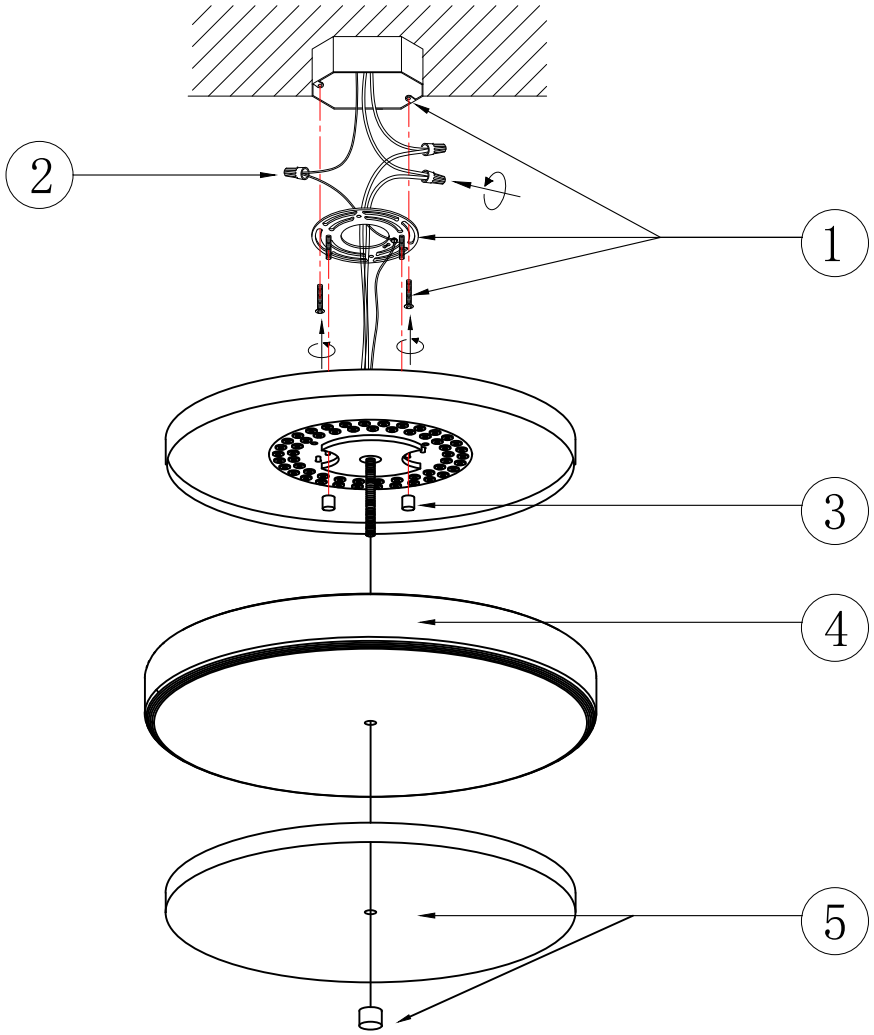

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Secure the Mounting Plate
Attach and tighten the mounting plate to the U.S. standard junction box using the provided screws.
Step 2: Connect the Wiring
Use wire nuts to connect the fixture wires to the pre-installed house wiring as follows:
Positive (hot) wire → Positive (hot) supply wire
Negative (neutral) wire → Negative (neutral) supply wire
Ground wire → Ground terminal
Caution: Ensure all wire connections are secure and no bare wire is exposed outside the wire nuts.
Step 3: Secure the Ceiling Canopy
Attach the ceiling canopy to the mounting plate and secure it using the provided decorative cap nuts.
Step 4: Install the Lampshade
Pass the lampshade through the threaded rod and attach it to the ceiling canopy.
Step 5: Install the Straight Edge Ceiling Plate
Pass the Straight Edge Ceiling Plate through the threaded rod and position it underneath the lampshade. Tighten the decorative nut onto the threaded rod to secure the plate and lampshade in place.
Installation Complete