
Assembly & Installation Instructions

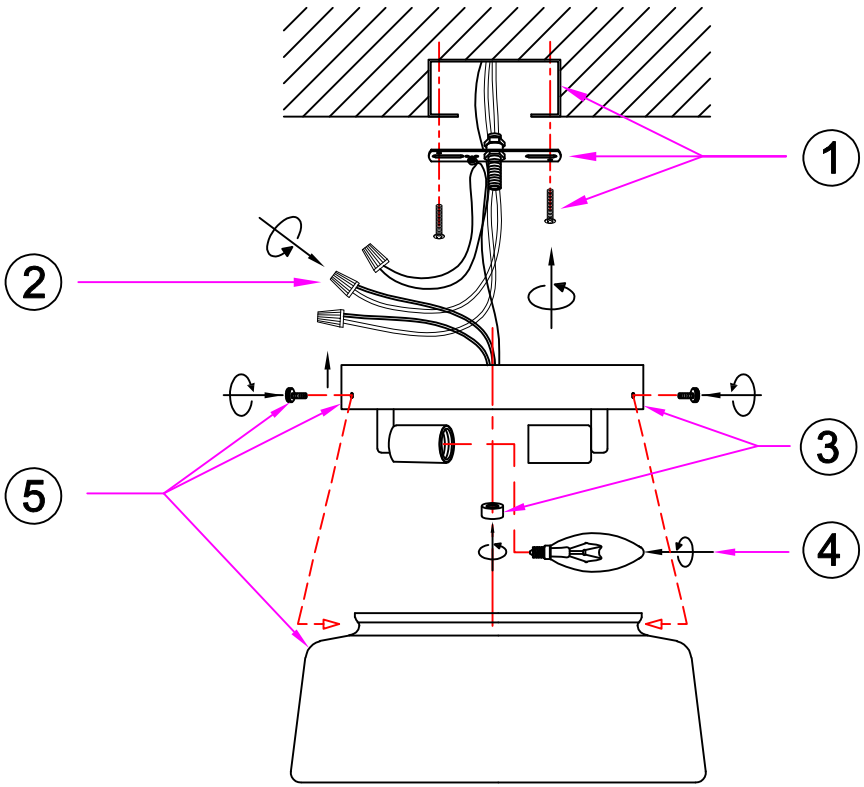

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Mount the Bracket
Use the mounting plate screws to attach the bracket securely to the U.S. standard junction box.
Step 2: Connect the Electrical Wires
Use wire nuts to connect the fixture wires to the house wiring as follows:
Black (hot) wire → black (hot) wire
White (neutral) wire → white (neutral) wire
Ground wire → ground terminal
Caution: Ensure that no bare wires are exposed outside the wire nuts to prevent electric shock.
Step 3: Secure the Ceiling Canopy
Fasten the ceiling canopy to the mounting bracket using the provided nuts.
Step 4: Install the Light Bulbs
Screw the bulbs into the sockets. (Bulbs not included.)
Step 5: Install the Glass Shade
Insert the glass shade into the ceiling canopy. Secure it in place using the straight-threaded thumb screws. Tighten gently until the shade is held securely.
Step 6: Restore Power and Test
Turn on the power and verify that the light bulbs are functioning properly.
Installation Complete