
Assembly & Installation Instructions

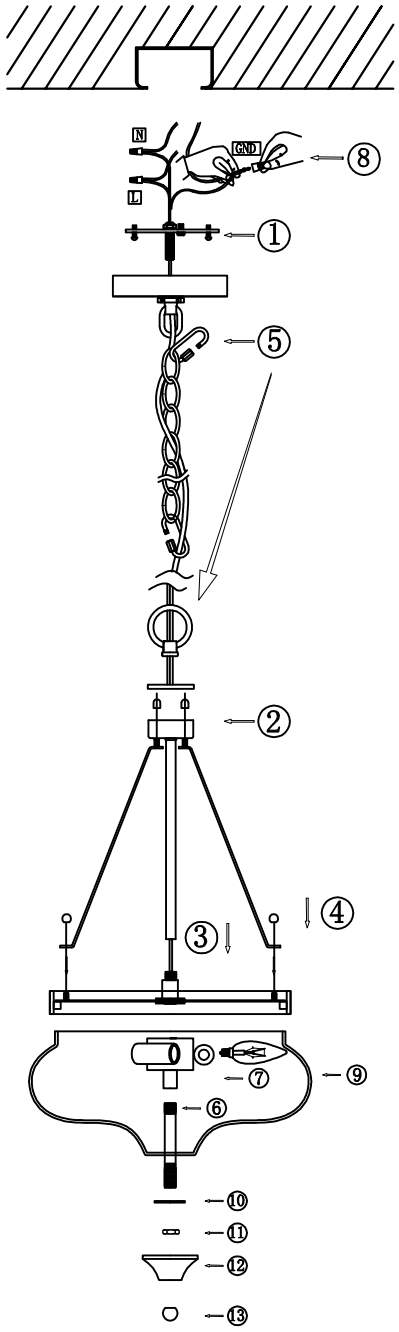

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Secure the mounting bracket to the ceiling wit nuts.
2. Insert the flat iron sheet into the lamp supporting and secure it tightly with the nut.
3. Screw the center rod downward onto the light fixture firmly.
4. Fasten the flat iron sheet to the light fixture using the round-head bolt.
5. Tighten the hanging ring, then thread the wire through the hanging chain, adjust the chain to the desired length, then secure the wire clasp to the threaded nipple.
6. Screw the straight pipe firmly onto the light fixture.
7. Install the bulb (NOT included) onto the light socket as indicated.
8. Connect the wires using wire connectors as follows:
Connect the BLACK wire of the main wire to the LIVE wire.
Connect the WHITE wire to the NEUTRAL wire.
Secure the fixture ground wire and external ground wire.
9. Install the glass lampshade onto the straight pipe.
10. Put the washer on the straight pipe.
11. Secure the iron sheet to the light fixture with the nut.
12. Install the bottom cover.
13. Tighten the bottom cover with the decorative nut.
14. Turn on the power switch to test for proper operation.