
Assembly & Installation Instructions

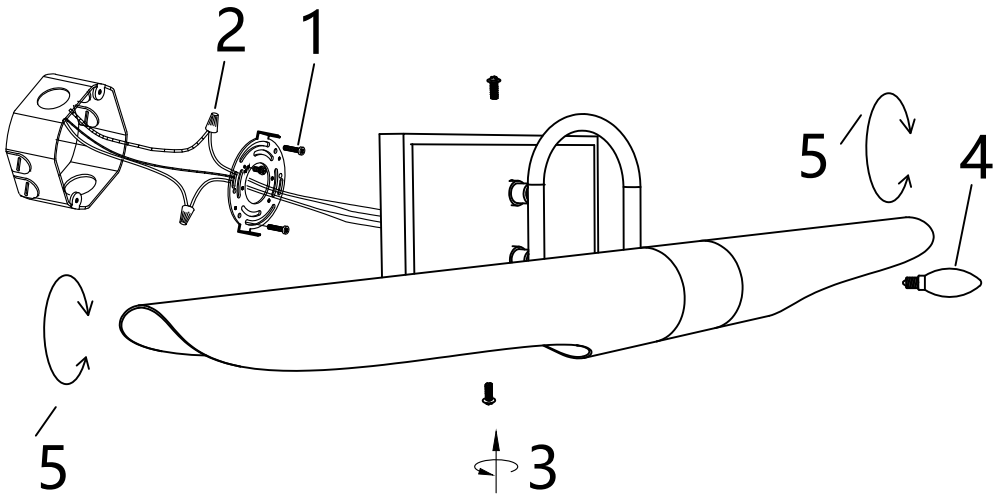

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Secure the mounting bracket to a U.S.-standard junction box with the mounting screws.
2.Connect the wires using wire terminals as follows:
Connect the WHITE wire to the NEUTRAL wire.
Connect the BLACK wire of the main wire to the LIVE wire.
Secure the fixture ground wire to the mounting bracket with the green grounding screw, then use a wire terminal to connect it to the external ground wire.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
3.Secure the ceiling plate to the mounting bracket with screws.
4.Install the bulb (NOT included) onto the socket as indicated.
5. The lampshade can be rotated 360 degrees for adjustment.