

Assembly & Installation Instructions

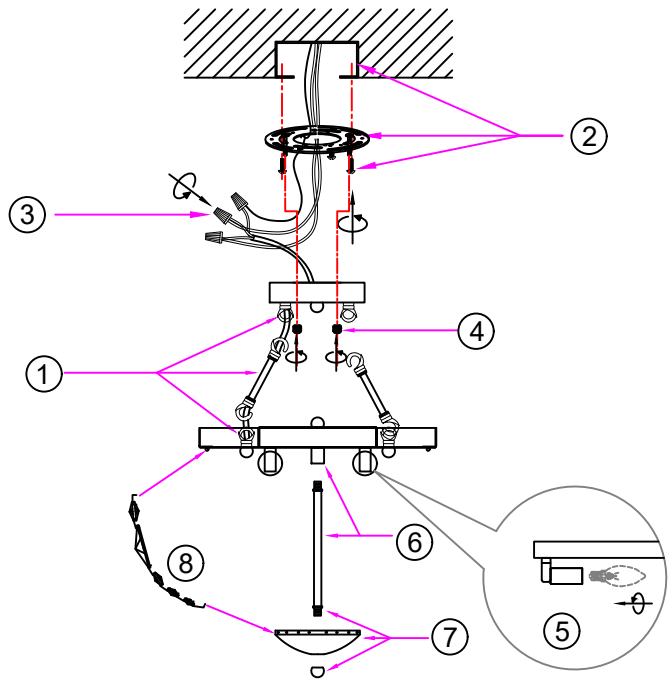



PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1.Attach the support rods to the canopy and fixture body, then thread the wires through the rods and canopy.
2.Secure the mounting bracket to the junction box with screws.
3.Connect the wires using the wire nuts (ensure no bare wires are exposed):
Connect the Black fixture wire to the Black (Live) supply wire.
Connect the White fixture wire to the White (Neutral) supply wire.
Wrap the fixture ground wire around the green grounding screw on the mounting bracket, then connect it to the house ground wire.
Carefully tuck all wires back into the junction box.
4.Secure the canopy to the mounting bracket using the decorative nuts.
5.Install the light bulbs (not included).
6.Screw the center stem into the fixture body.
7.Secure the bottom cover to the center stem with the finial.
8.Install the crystal strands, attaching the larger end to the fixture body and the smaller end to the bottom cover.
9.Restore power and test the fixture.
Installation complete.