
Assembly & Installation Instructions

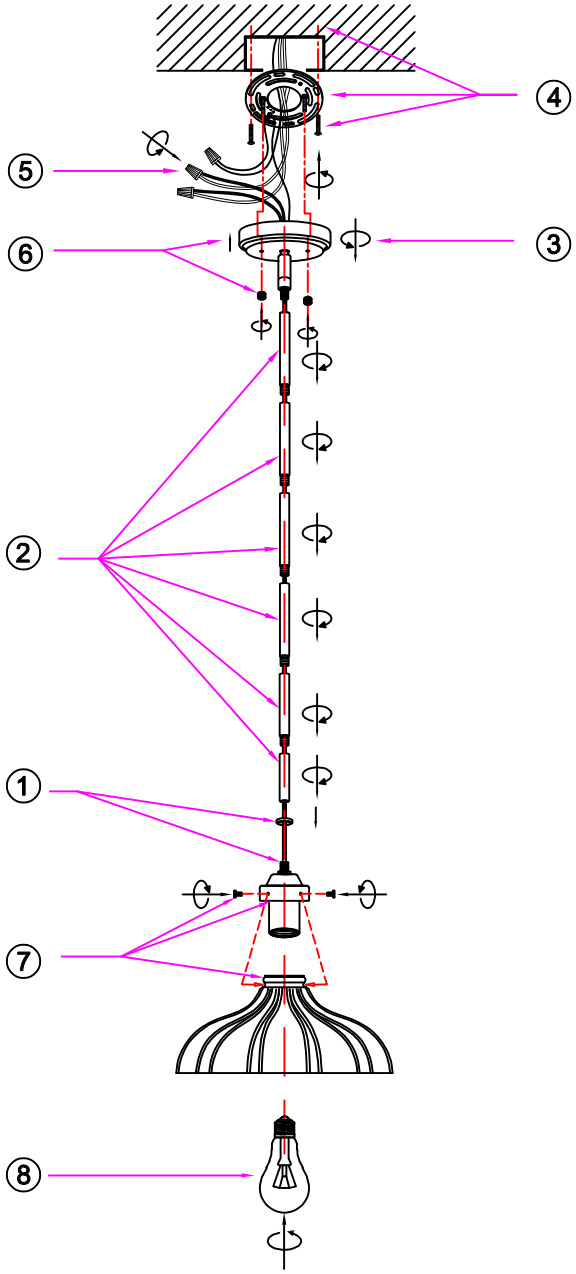

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Attach Tube Cover
Place the tube cover onto the threaded pipe of the fixture.
Step 2:Thread Power Cord
Thread the power cord through the downrod and attach it to the fixture.Adjust the number of downrods according to the desired length.
Step 3:Attach Canopy
Thread the power cord through the ceiling canopy and secure the canopy onto the downrod.
Step 4:Mount Bracket
Secure the mounting bracket to the U.S. standard junction box using the mounting screws.
Step 5:Connect Wires
Connect the supply wires to the fixture wires using wire connectors:
-Black wire to black wire (live/hot), white wire to white wire (neutral), and the ground wire to the grounding terminal.
-Ensure no wires are exposed during the wiring .
Step 6:Secure Canopy
Secure the ceiling canopy to the mounting plate using nuts.
Step 7:Install Shade
Insert the lampshade into the lamp cup,secure it using the knurled screws (hand-tighten gently).
Step 8:Install Bulb
Install the light bulb into the lamp socket.
Step 9:Power Test
Turn on the power and verify that the bulb is functioning properly.
Installation is complete