
Assembly & Installation Instructions

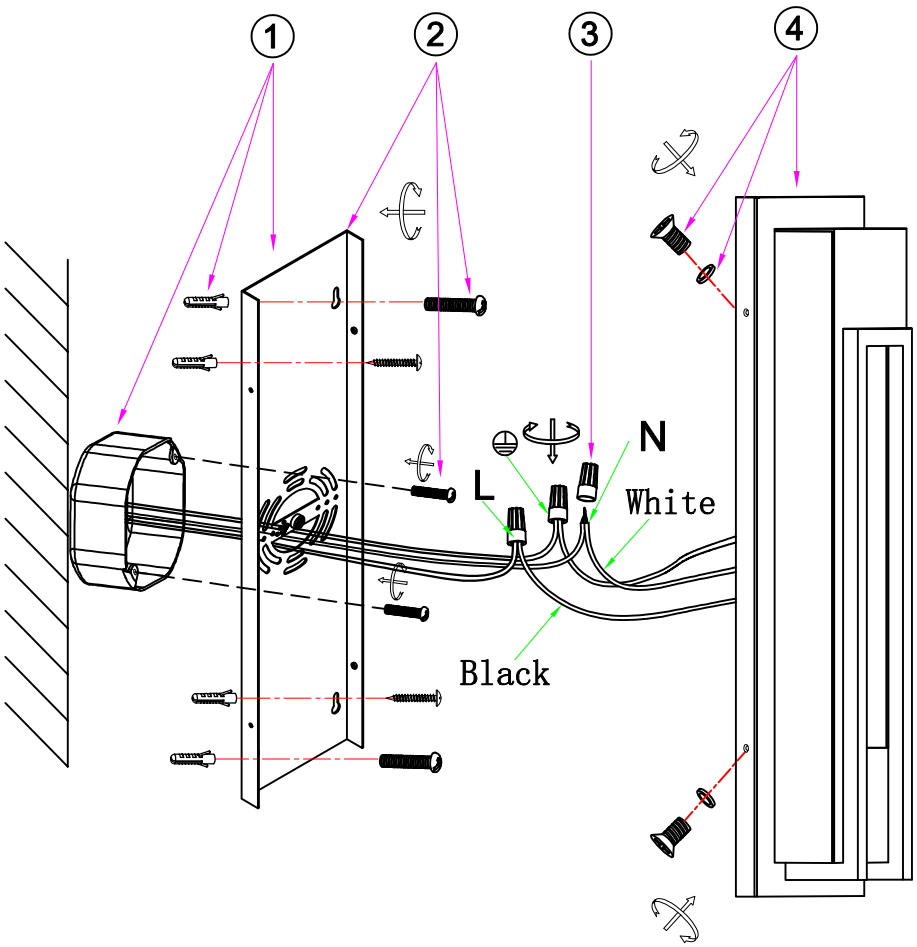

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Mark & Drill Holes
Mark: Temporarily fix the mounting bracket to the junction box. Mark the positions of the reinforcement holes on the ceiling.
Drill: Remove the bracket, drill two appropriately sized holes at the marked positions, and insert the plastic anchor.
Step 2:Mount Bracket
Secure the mounting bracket to the junction box using the junction box screws(in the hardware pack), then fasten it to the plastic anchors using the self-tapping screws (sharp point).
Step 3:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black to Live (Hot), White to Neutral, and Ground to Ground via the green grounding screw on the mounting bracket.
-Ensure no wires are exposed during the wiring .
Step 4:Attach Ceiling Canopy
Place the canopy over the mounting bracket, insert the screws through the silicone washers, and then tighten the screws into the mounting bracket to secure the canopy.
Step 5：Power Test
Turn on the power and verify that the bulb is functioning properly.
Installation is complete.