
Assembly & Installation Instructions

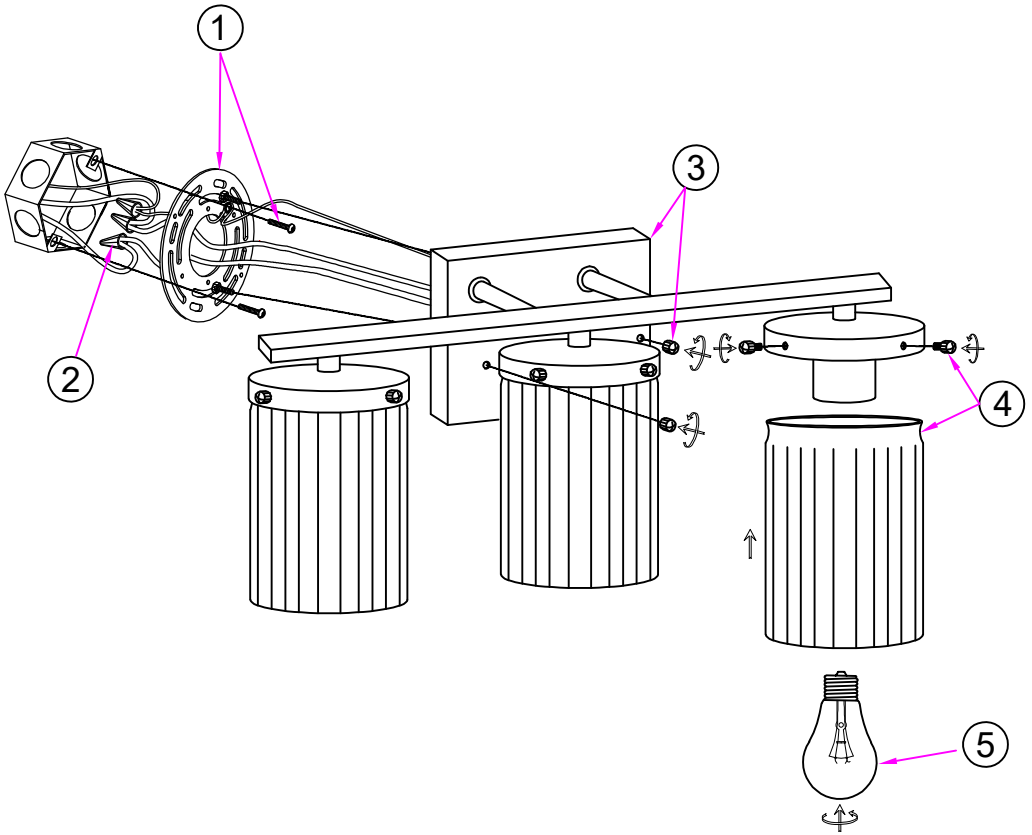

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Install the Mounting Bracket

Secure the mounting bracket to the U.S. standard junction box using the provided screws.

Step 2: Connect the Wires

Use wire nuts to connect the fixture wires to the pre-installed house wiring as follows:

Black(live) wire → house hot (live) wire

White (neutral)wire → house (neutral) wire

Ground wire → house ground wire, or attach to the mounting bracket using the provided green grounding screw

Caution: Ensure that no bare wires are exposed outside the wire nuts to prevent electric shock.

Step 3: Attach the Ceiling Canopy

Place the ceiling canopy over the mounting bracket and secure it using the decorative nuts.

Step 4: Install the Lampshade

Insert the lampshade into the fixture body, then secure it using the provided thumb screws. (Do not overtighten.)

Step 5: Install the Light Bulb

Screw in the appropriate light bulb (not included).

Step 6: Restore Power and Test

Turn on the power and verify that the fixture is operating properly.