
Assembly & Installation Instructions

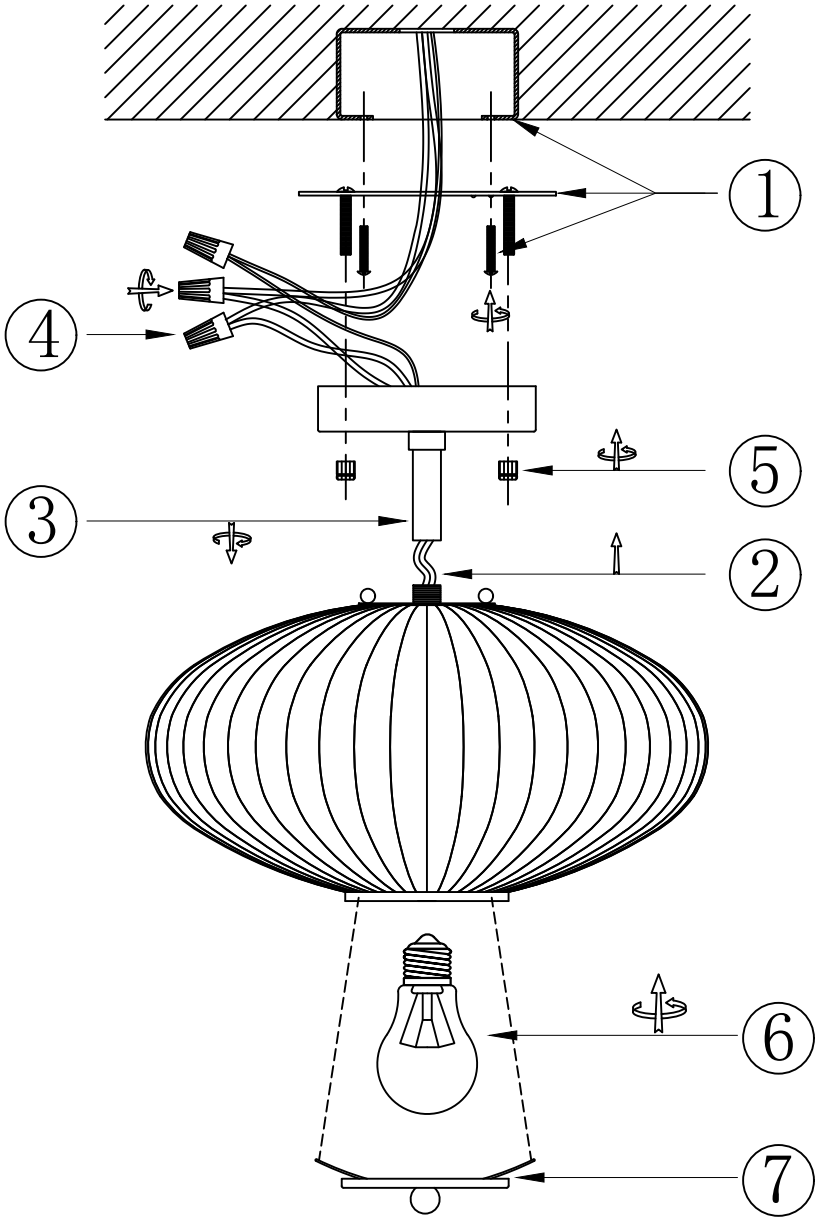

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Secure the Mounting Plate
Attach the mounting plate to the U.S. standard junction box using the provided screws.
Step 2: Route the Wires Through the Ceiling Canopy
Pass the electrical wires through the ceiling canopy.
Step 3: Tighten the Canopy Tube to the Lampshade
Secure the ceiling canopy metal tube by tightening it onto the threaded top of the lampshade.
Step 4: Connect the Electrical Wires
Use wire nuts to connect the fixture wires to the house wiring as follows:
Black (hot) wire → black (hot) wire
White (neutral) wire → white (neutral) wire
Ground wire → ground terminal
Caution: Ensure all wire connections are secure and no bare wire is exposed outside the wire nuts.
Step 5: Attach the Ceiling Canopy
Secure the ceiling canopy to the mounting plate using the provided nuts.
Step 6: Install the Light Bulb
Install the light bulb into the socket. (Bulb not included.)
Step 7: Install the Glass Shade Bottom Cover
Compress the lampshade holder spring, then insert it into the bottom of the glass shade.
Step 8: Restore Power and Test
Turn on the power and verify that the fixture is operating properly.
Installation Complete