
Assembly & Installation Instructions

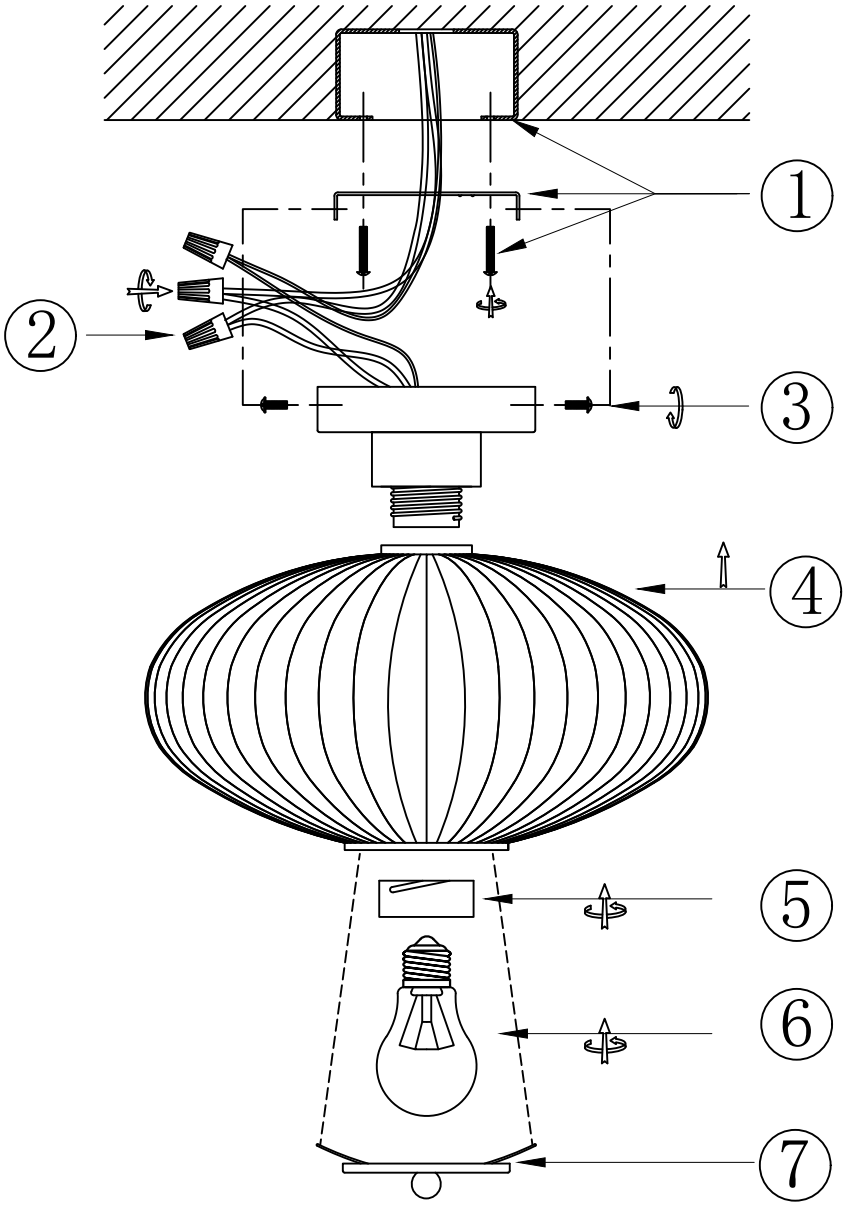

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. WARNING - Disconnect power before relamping or wiring the fixture.
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1:Mount Bracket
Secure the mounting bracket to the U.S. standard junction box using the screws.
Step 2:Connect Wires
Connect the fixture wires to the pre-installed wires in the junction box using wire connectors:
-Black(L) to Black (Live/Hot);
-White(N) to White (Neutral);
-Ground(G) wire to the grounding terminal.
Caution:Ensure no wires are exposed during the wiring.
Step 3:Attach Ceiling Canopy
Attach the canopy to the mounting bracket and secure it with screws.
Step 4:Attach Lampshade
Install the lampshade onto the lamp socket.
Step 5:Secure Shade Ring
Tighten the lampshade and lamp socket using the socket ring Step.
Step 6:Install Bulb
Install the light bulb into the lamp socket.
Step 7:Fix wire belt clip
Press the metal wire belt clip and insert it into the bottom of the glass shade.
Step 8:Power Test
Turn on the power and verify that the bulb is functioning properly
Installation is complete